TECHNICAL REPORT NO. 1

November 1953

ON THE USE OF COORDINATE PERTURBATIONS
IN THE SOLUTION OF PHYSICAL PROBLEMS

by

PHYLLIS ANN FOX
Research Assistant in Mathematics
September 1951 — June 1953

Project for Machine Methods of Computation
and Numerical Analysis

MASSACHUSETTS INSTITUTE
OF
TECHNOLOGY

TECHNICAL REPORT NO. 1
NOVEMBER 1953

ON THE USE OF COORDINATE PERTURBATIONS
IN THE SOLUTION OF PHYSICAL PROBLEMS

by

PHYLLIS ANN FOX
Research Assistant in Mathematics
September 1951 - June 1953

MACHINE METHODS
of
COMPUTATION
and
NUMERICAL ANALYSIS

Submitted to the
OFFICE OF NAVAL RESEARCH
Under Contract N5ori60

Project DIC 6915
MASSACHUSETTS INSTITUTE OF TECHNOLOGY
Cambridge 39, Massachusetts

FOREWORD

This is the first Technical Report of the Project on Machine Methods of Computation. The Project is financed by contract N5ori60 of the Office of Naval Research. It is an outgrowth of the activities of the Institute Committee on Machine Methods of Computation, established in November 1950.

Purpose of the Project is (1) to integrate the efforts of all the departments and groups at MIT who are working with modern computing machines and their applications and (2) to train men in the use of these machines for computation and numerical analysis.

PERSONNEL OF THE PROJECT

FACULTY SUPERVISORS: COMMITTEE ON MACHINE METHODS OF COMPUTATION

Philip M. Morse, Chairman	Physics
Samuel H. Caldwell	Electrical Engineering
Herman Feshbach	Physics
Jay W. Forrester	Electrical Engineering
Francis B. Hildebrand	Mathematics
John A. Hrones	Mechanical Engineering
Chia-Chiao Lin	Mathematics

TABLE OF CONTENTS

INTRODUCTION

This study deals with possible improvements effected
in solutions to physical problems by changes in the coordinate
system of the problem. In particular, perturbation solutions
to the problems are investigated with a view to improving the
usual solution by allowing a perturbation of the independent
variables as well as of the dependent variables. The technique
has proved useful for wave propagation problems of a hyperbolic
nature described in Chapter 2, but has been less successful
for the elliptic problem of the flow past a thin airfoil dis-
cussed in Chapter 3.

The idea of perturbing the independent variable of
a problem was used some time ago by Poincaré in finding the
limit cycle of a nonlinear oscillator [20], and more recently
(1949) M. J. Lighthill considered the method at some length
in a most interesting paper [12]. Lighthill considers vari-
ous types of ordinary differential equations whose usual per-
turbation solutions are unsatisfactory, and also in this paper
he deals briefly with nonlinear partial differential equations.
In a later paper [11] he applies the technique of coordinate
perturbation to correcting the usual solution to the problem
of incompressible flow past a thin airfoil. In the usual
solution which is based on the small slope of the airfoil
profile a satisfactory answer is not obtained near the lead-
ing edge of a blunt nosed airfoil, but Lighthill found that
a small constant shift of the coordinate system corrected the

first order solution, making it valid uniformly, and he implied that successive corrections could be made in the coordinates as the higher order perturbation solutions were found.

This problem was the initial impetus of our investigation, and it was planned to study the problem at greater length and in particular with reference to the case of compressible flow. However, as the study progressed it became clear that the perturbation series developed for the independent variables were not satisfactory. Actually the successive perturbation functions in these series, in order to correct the increasing order of singularities in the velocity functions near the leading edge, have to carry the singularities themselves, and in the singular region each term of the perturbation series becomes of the same instead of decreasing order. The results and the failure of the series near the leading edge are discussed in more detail in Chapter 3.

Nevertheless the hope remained that at least some sort of one-stage correction could be found for the case of compressible flow past a thin airfoil, since the small constant coordinate shift does effectively correct the incompressible case. Several lines of investigation were attempted and various types of coordinate correction were considered, but unfortunately none of them proved successful. For example a constant coordinate shift is no longer correct since it does not satisfy the more complicated equations for the compressible

case. Then as far as other types of functions are concerned one important aspect arising from the investigation should be remarked. Upon attempting series expansions based on a perturbation parameter, ε , in the form

$$x = x^{(0)}(X,Y) + \varepsilon x^{(1)}(X,Y) + \varepsilon^2 x^{(2)}(X,Y) + \ldots \qquad (1.1)$$

where X and Y are new coordinates, it was found that functions of the type, $x^{(1)}$, appearing in (1.1) could not be obtained, but rather that due both to boundary conditions and to changes of order in the derivatives of the perturbation functions that the functions were of the form

$$x^{(1)}(X,Y,\varepsilon) \qquad (1.2)$$

In other words the functions, $x^{(1)}$, did not fit the usual type of perturbation solution (1.1).

Actually such functions might be acceptable in a new frame of perturbation solutions of the type

$$x = x^{(0)}(X,Y,\varepsilon) + \varepsilon x^{(1)}(X,Y,\varepsilon) + \varepsilon^2 x^{(2)}(X,Y,\varepsilon) + \ldots \qquad (1.3)$$

where the ε necessary to fulfill the requirements of the problem is allowed to appear in the perturbation functions. This line of investigation has not been pursued, but might lead to new methods of problem solution and is perhaps worthy of some study.

Next, since it had not been possible to find real solution improvement for the elliptic case, the investigation turned to problems of a hyperbolic character. In particular

the nonlinear hyperbolic partial differential equations govern-
ing wave propagation dependent on one space variable and one
time variable were considered. Problems of this sort for the
cases of spherical and cylindrical waves have been discussed
by Whitham [23], [24], in papers where a correction in one
set of characteristics is advocated. That is in lieu of
using the usual functions of a linearized characteristic vari-
able in the form

$$f(x - c_o t) \, , \qquad c_o = \text{speed of sound at infinity} \qquad (1.4)$$

where the characteristics are straight and parallel in the (x, t)-
plane, Whitham suggests a correction in the form of a new
variable, z, which is to be constant along the true character-
istics of the problem now to be solved by functions of the
type $f(z)$. He has obtained interesting results from this ap-
proach, but a drawback of the method is its failure to deal
with both sets of characteristics at the same time.

The question arose as to whether it might not be pos-
sible to devise a method correcting the solution along both
characteristic directions, and thus allow for waves propagating
in either direction. It seemed natural to consider solutions
expanded in terms of characteristic variables both for the
dependent and independent variables, since in this way both
the physical quantities and the correct characteristic curves
might be found in the physical (x, t)-plane by a mapping from
the characteristic plane. Attention was restricted mainly to
the case of plane wave propagation where the equations are

simpler than for higher dimensional cases, and a solution was attempted in terms of characteristic variables α and β for velocity, u, and speed of sound, c, and for the originally independent space and time variables x and t. For a perturbation parameter, ε, the solutions were assumed in the form

$$u = u^{(0)}(\alpha,\beta) + \varepsilon u^{(1)}(\alpha,\beta) + \varepsilon^2 u^{(2)}(\alpha,\beta) + \ldots$$

$$c = c^{(0)}(\alpha,\beta) + \varepsilon c^{(1)}(\alpha,\beta) + \varepsilon^2 c^{(2)}(\alpha,\beta) + \ldots$$

$$x = x^{(0)}(\alpha,\beta) + \varepsilon x^{(1)}(\alpha,\beta) + \varepsilon^2 x^{(2)}(\alpha,\beta) + \ldots$$

$$t = t^{(0)}(\alpha,\beta) + \varepsilon t^{(1)}(\alpha,\beta) + \varepsilon^2 t^{(2)}(\alpha,\beta) + \ldots$$

$$(1.5)$$

Such a type of solution proved to be most satisfactory. In the case of a plane wave the series for u and c terminate, and a general expression can be found for the nth perturbation function in the series for x and for t. Furthermore, and of some importance, one finds that the convergence of these latter two series can be demonstrated for sufficiently small initial disturbances so that the correctness of the solution is assured. More precisely, the convergence is dependent on the size of the initial disturbance u' and c' to the base quantities u_0 and c_0 only to the extent of requiring that

$$\frac{u'}{u_0} < \frac{2}{\gamma+1} \qquad \frac{c'}{c_0} < \frac{\gamma-1}{\gamma+1} \qquad (1.6)$$

where γ is the adiabatic exponent so that for example if $\gamma = 1.4$

$$\frac{u'}{u_0} < 0.833 \quad , \qquad \frac{c'}{c_0} < 0.166 \ .$$

In terms of density, ρ, this becomes

$$\frac{\rho'}{\rho_0} < 1.161$$

which is of the order of the requirement on velocity dis-
burbance. In other words the series is a convergent one even
for an initial density ratio as high as 2.16.

The convergence of the series in the ordinary regions
of the flow is useful, but the outstanding fact is that conver-
gence persists into the region where the mapping from the charac-
teristic plane onto the physical plane becomes multiple-valued
and where a shock would develop. In such a region the charac-
teristics in the physical plane form an envelope, and one can
show from the solutions (1.5) that the envelope develops for t
of the order of $1/\varepsilon$. Then by digressing to state that the
usual type of perturbation solution takes the form (see Chapter 2)

$$u = f^{(0)}(x,t) + \varepsilon f^{(1)}(x,t) + \varepsilon^2 t f^{(2)}(x,t) + \varepsilon^3 t \, f^{(3)}(x,t) + \ldots$$

or
$$(1.7)$$

$$u = f^{(0)}(x,t) + \varepsilon \left[f^{(1)}(x,t) + \varepsilon t f^{(2)}(x,t) + (\varepsilon t)^2 f^{(3)}(x,t) + \ldots \right]$$

the great improvement introduced by solution (1.5) becomes clear.
Equation (1.5) converges in a perturbation sense of decreasing
order of terms even as t becomes $O(1/\varepsilon)$, but the terms in (1.7)
become all of the same order for this size t and no longer repre-
sent a satisfactory perturbation solution. The solution (1.7)
fails in the same way as that for the elliptic case did, but
(1.5) remains satisfactory.

In extending (1.5) into the region where the solution becomes multiple-valued, a shock wave is introduced to allow a jump in the physical quantities. Its location can be satisfactorily demonstrated, and one can show that the shock speed is the average of the slopes of the characteristics on either side. The distance, x, which the solution may be continued beyond the point of shock development depends on the degree of accuracy desired. It is shown that an error of the order of $\varepsilon x^{3/2}$ is introduced into the solution at a distance x along the shock.

The theory developed in Chapter 2 is illustrated there by a particular example of an initial value problem involving a periodic distribution of density in a fluid initially at rest. The solution to the problem is found both for the usual type of perturbation theory and for the improved type, and the advantages of the second type are demonstrated.

One would hope that the same advantages arising from coordinate perturbation in the plane wave case would carry over to the higher dimensional cases of cylindrical and spherical flow. Of course one can carry out the same steps of the process, but for these cases where the equations are more complicated the series for u and c no longer terminate, and as yet no convergence proof for the series has been obtained. There is thus no guarantee of the solutions, but as is after all usually the case with perturbation solutions one can assume validity for "small enough" epsilon. It seems appropriate to extend the coordinate per-

turbation technique to these problems, justifying the procedure
by the improvement the technique brought to the plane wave
case, and hoping that in time a convergence proof will be
developed outlining the regions of validity of a solution.

In summary then coordinate perturbation is a very
useful technique for improving the perturbation solutions to
problems of a hyperbolic nature. The characteristic variables
are the "natural" variables of the problem and it now seems
clear that all the quantities of a problem including the physi-
cal coordinates should be expanded in terms of the character-
istic variables if the best type of perturbation scheme is to
be used. For the elliptic case on the other hand no set of
natural variables is available. Problem solution in terms of
the imaginary characteristics is of no advantage, and so when
a solution becomes unsatisfactory and singularities arise
one's only recourse is to modify their effect in some way. In
the case of the airfoil the singularity could be partially
hidden inside the profile but its presence was still felt in
the region of the leading edge and the singular behavior of
the solution in the region persisted.

It is concluded that coordinate perturbation as dis-
cussed in this thesis does not yet offer a real improvement to
elliptic problems, but rather finds great usefulness in its
application to hyperbolic problems where the technique allows
the solution to hold even somewhat after the development of a
shock.

THE HYPERBOLIC CASE

A. Plane Wave Propagation

Introduction:

The solution to the problem of one-dimensional isentropic wave propagation may always be given in the form of an integral involving the Riemann function and the initial conditions and boundary conditions of the problem [16], [1]. However, except in certain special cases, such a representation of the solution is not very tractable, and some other form would be more useful.

One of the alternative forms of solution often appropriate, and in fact one of the favorite approaches of applied mathematicians, is that of a perturbation solution where the problem is linearized by expanding the solution in terms of a small parameter of the problem. The resultant solution is satisfactory as long as the series behaves properly, but there may be regions where the solution fails. In particular, as will be shown later, for the problem of plane wave propagation the series will diverge in regions where a shock starts to form and in these regions the series solution is no longer satisfactory.

In the attempt to overcome such drawbacks of the perturbation type of solution, and in line with the general aims of this investigation, a solution to the plane wave problem has been found in terms of a perturbation not only of the dependent quantities, velocity and density, but also of the space and time variables, x and t. The new independent variables

used are the characteristic parameters, and the four perturba-
tion series for x, t, velocity, and density are expanded in
terms of functions of the characteristics. The solution seems
most promising in that the convergence of the series can be
proved for an appropriately chosen perturbation parameter, and
also in the fact that the region of shock development can be
studied. That is, even though the mapping of the characteristic
plane onto the physical plane becomes multiple-valued indicating
the appearance of a shock, the solution series does not break
down, and may be used to describe the phenomenon even somewhat
after the formation of a weak shock.

In the first section of this part the four perturbation
series are found for the initial value problem with general
initial conditions, and a proof of the convergence of the series
is given. An example of a simple physical problem is then given
to illustrate such aspects as the inadequacies of the usual type
of perturbation solution and the improvement effected by the im-
proved perturbation solution. A further simplification of the
example problem is then made so that the solution may be found
easily from the Riemann function, expanded in terms of the small
perturbation parameter, ε , and compared with the perturbation
solution. The solutions are found to agree and in fact the order
of ε required to allow the expansion of this latter solution is
that expected from the general theory.

The second section is concerned with the incidence of
a shock wave. The geometry of the mapping of the characteristic
plane onto the physical plane is discussed, and the ability of

the solution to penetrate slightly into the region where the mapping starts to "fold over" is demonstrated. In the discussion entropy changes are neglected so that accuracy only through second order in shock strength is maintained. The same physical example used above is described near the regions of shock development.

Section 1: Perturbation solution and proof of convergence.

When the equations governing the propagation of a plane wave are cast into the form of differential equations along the characteristic directions of the problem, they become, for the case of a polytropic gas,

$$x_\alpha = (u + c)t_\alpha \qquad \frac{u_\alpha}{2} + \frac{c_\alpha}{\gamma - 1} = 0$$

$$x_\beta = (u - c)t_\beta \qquad \frac{u_\beta}{2} - \frac{c_\beta}{\gamma - 1} = 0$$

(2.1)

where γ is the adiabatic exponent, α and β , the characteristic variables, and u and c the local velocity and speed of sound respectively [4].

Since a perturbation form of the solution to the initial value problem is to be obtained, the initial conditions must be given as disturbances superimposed on some prior uniform state. The choice of values to be assigned to α and β on the initial line is governed only by the requirement that a correct parametric (for example single-valued) representation of the initial state is achieved since the equations (2.1) are homogeneous in α or β . For simplicity the initial line $t = 0$, in the characteristic plane will be chosen as $x = \alpha = \beta$.

Then for a perturbation parameter ε, and initial perturbations $c_o g(x)$ and $c_o f(x)$ to c and u, the initial conditions become

$$\text{on } \alpha - \beta \begin{cases} x = \alpha = \beta \\ t = 0 \\ c = c_0(1 + \varepsilon g(\alpha)) = c_0(1 + \varepsilon g(\beta)) \\ u = \varepsilon c_0 f(\alpha) = \varepsilon c_0 f(\beta), \end{cases} \quad (2.2)$$

where the unperturbed gas was assumed at rest with uniform density.

A solution to equations (2.1) under the conditions of (2.2) is to be attempted in the form of the perturbation series,

$$x = x^{(0)} + \varepsilon x^{(1)}(\alpha,\beta) + \varepsilon^2 x^{(2)}(\alpha,\beta) + \ldots$$

$$t = t^{(0)} + \varepsilon t^{(1)}(\alpha,\beta) + \varepsilon^2 t^{(2)}(\alpha,\beta) + \ldots$$

$$u = u^{(0)} + \varepsilon u^{(1)}(\alpha,\beta) + \varepsilon^2 u^{(2)}(\alpha,\beta) + \ldots$$

$$c = c^{(0)} + \varepsilon c^{(1)}(\alpha,\beta) + \varepsilon^2 c^{(2)}(\alpha,\beta) + \ldots$$

$$(2.3)$$

This form of solution will linearize the problem and give sets of equations from which the higher order perturbation functions may be successively determined.

The terms free from ε in the equations and initial conditions yield the initial approximation

$$x^{(0)} = \frac{\alpha + \beta}{2}$$

$$c_o t^{(0)} = \frac{\alpha - \beta}{2}$$

$$u^{(0)} = 0$$

$$c^{(0)} = c_0.$$

(2.4)

For the functions u and c, the boundary conditions together with the two equations of (2.1) homogeneous in u and c, show that in (2.3) one will obtain

$$u^{(k)} = 0 \quad \text{and} \quad c^{(k)} = 0 \quad \text{for } k > 1,$$

(2.5)

whereas for $u^{(1)}$ and $c^{(1)}$ one finds

$$\frac{u^{(1)}}{2} + \frac{c^{(1)}}{\gamma - 1} = r(\beta)$$

$$\frac{u^{(1)}}{2} - \frac{c^{(1)}}{\gamma - 1} = -s(\alpha)$$

(2.6a)

where the initial conditions require

$$r(\beta) = c_o \left(\frac{f(\beta)}{2} + \frac{g(\beta)}{\gamma - 1} \right)$$

$$-s(\alpha) = c_o \left(\frac{f(\alpha)}{2} - \frac{g(\alpha)}{\gamma - 1} \right)$$

(2.6b)

From these expressions and from equations (2.1), any perturbation function $x^{(k)}$ or $t^{(k)}$ is found from,

$$x^{(\kappa)} = \frac{1}{2}\int_{\beta}^{\alpha}(u^{(1)}+c^{(1)})\frac{\partial t^{(\kappa-1)}}{\partial\alpha}d\alpha - \frac{1}{2}\int_{\beta}^{\alpha}(u^{(1)}-c^{(1)})\frac{\partial t^{(\kappa-1)}}{\partial\beta}d\beta$$

$$t^{(\kappa)} = -\frac{1}{2c_0}\int_{\beta}^{\alpha}(u^{(1)}+c^{(1)})\frac{\partial t^{(\kappa-1)}}{\partial\alpha}d\alpha - \frac{1}{2c_0}\int_{\beta}^{\alpha}(u^{(1)}-c^{(1)})\frac{\partial t^{(\kappa-1)}}{\partial\beta}d\beta \quad . \tag{2.7}$$

In equations (2.7) using equations (2.6) the integrands contain,

$$\frac{u^{(1)} + c^{(1)}}{2c_0} = Ar(\beta) - Bs(\alpha)$$

$$\tag{2.8}$$

$$\frac{u^{(1)} - c^{(1)}}{2c_0} = Br(\beta) - As(\alpha)$$

where
$$A = \frac{\gamma+1}{4c_0} , \qquad B = \frac{3-\gamma}{4c_0} .$$

Now since the functions $x^{(k)}$ and $t^{(k)}$ are analogous, only the functions $t^{(k)}$ will be treated, and it will be shown that these functions may be expressed in a certain general form. Then from this expression, the convergence of the perturbation series for t may be proved.

The form assumed by the functions will be shown to be,

$$c_0 t^{(n+1)} = \sum_{\lambda+\mu+\rho+\nu = n+1} R^{(n+1)\,\lambda,\mu}_{\rho,\nu}\; r^{\rho}(\beta)s^{\nu}(\alpha)\int_{\beta}^{\alpha} r^{\lambda}(\xi)s^{\Gamma}(\xi)d\xi \tag{2.9}$$

where

$$R^{(n+1)\,\lambda,\mu}_{\quad\ \rho,\nu} = R^{(n+1)\,\mu,\lambda}_{\quad\ \nu,\rho} = \text{constants such that:}$$

$$R^{(n+1)\,\lambda,\mu}_{\quad\ \rho,\nu} = R^{(n)\,\lambda,\mu}_{\quad\ \rho-1,\nu}\left(B\frac{\rho-1}{\rho} - A\right) + R^{(n)\,\lambda,\mu}_{\quad\ \rho,\nu-1}\left(B\frac{\nu-1}{\nu} - A\right) +$$

$$B\sum_{q=0}^{\mu-1}\frac{1}{q+1}R^{(n)\,\lambda,\mu-1-q}_{\quad\ \rho,q}\,\delta_{\nu 0} + B\sum_{q=0}^{\lambda-1}\frac{1}{q+1}R^{(n)\,\lambda-q,\mu}_{\quad\ q,\nu}\,\delta_{\rho 0} \ . \quad (2.10)$$

$\delta_{\nu 0} = \text{kronecker delta}$

(all indices in (2.10) non-negative)

Proof of the validity of (2.9) is carried out by mathematical induction from equations (2.7) and (2.8).

At the first stage for $\quad\lambda+\mu+\rho+\nu = 0$ evidently (2.9) holds since

$$c_0 t^{(0)} = \frac{\alpha - \beta}{2}$$

From (2.9):

$$\frac{\partial}{\partial\alpha}\left(c_0 t^{(n)}\right) = \sum_{j+k+\rho+q=n}R^{(n)\,j,k}_{\quad\ \rho,q}\,r^{\rho}(\beta)\left[q\,s^{q-1}(\alpha)\frac{\partial s}{\partial\alpha}\int_{\beta}^{\alpha}r^{j}(\mu)s^{k}(\mu)d\mu + s^{q+k}(\alpha)r^{j}(\alpha)\right]$$

$$\frac{\partial}{\partial\beta}\left(c_0 t^{(n)}\right) = \sum_{j+k+\rho+q=n}R^{(n)\,j,k}_{\quad\ \rho,q}\,s^{q}(\alpha)\left[\rho r^{\rho-1}(\beta)\frac{\partial r}{\partial\beta}\int_{\beta}^{\alpha}r^{j}(\mu)s^{k}(\mu)d\mu - r^{\rho+j}(\beta)s^{k}(\beta)\right] \quad (2.11)$$

so that equation (2.7) for $t^{(n+1)}$ becomes

$$C_0 t^{(n+1)} = \int_\beta^\alpha \sum_{j+k+p+q=h} R_{h,q}^{(n)j,k} r^p(\beta) \left[B_q s^q(\xi) \frac{\partial s}{\partial \xi} \int_\beta^\xi r^j s^k d\mu + B s^q(\xi) r^j(\xi) - \right.$$

$$\left. - A_q r(\beta) s^{q-1}(\xi) \frac{\partial s}{\partial \xi} \int_\beta^\xi r^j s^k d\mu - A r(\beta) s^q(\xi) r^j(\xi) \right] d\xi +$$

$$+ \int_\beta^\alpha \sum_{j+k+p+q=n} R_{p,q}^{(n)j,k} s^q(\alpha) \left[A p s(\alpha) r^{p+j}(\xi) \frac{\partial r}{\partial \xi} \int_\xi^\alpha r^j s^k d\mu - A s(\alpha) r^{p+j}(\xi) s^k(\xi) - \right.$$

$$\left. - B p r^p(\xi) \frac{\partial r}{\partial \xi} \int_\xi^\alpha r^j s^k d\mu + B r^{p+j+1}(\xi) s^k(\xi) \right] d\xi . \quad (2.12)$$

Then use is made of the formula,

$$\int_\beta^\alpha \frac{\partial s^r(\xi)}{\partial \xi} \left[\int_\beta^\xi r^m(\mu) s^n(\mu) d\mu \right] d\xi = s^r(\alpha) \int_\beta^\alpha r^m(\mu) s^n(\mu) d\mu - \int_\beta^\alpha r^m(\mu) s^{r+n}(\mu) d\mu \quad (2.13)$$

and equation (2.12) may be integrated using (2.13) to give

$$C_0 t^{(n+1)} = \sum_{j+k+p+q=n} R_{p,q}^{(n)j,k} r^p(\beta) \left[\frac{B_q}{q+1} s^{q+1}(\alpha) \int_\beta^\alpha r^j s^k d\mu - \frac{B_q}{q+1} \int_\beta^\alpha r^j s^{k+q+1} d\mu - A r(\beta) s^q(\alpha) \int_\beta^\alpha r^j s^k d\mu + \right.$$

$$\left. + A r(\beta) \int_\beta^\alpha r^j s^{k+q} d\mu + B \int_\beta^\alpha s^{q+k+j} r^j d\mu - A r(\beta) \int_\beta^\alpha s^{q+k} r^j d\mu \right] +$$

$$+ \sum_{j+k+p+q=n} R_{p,q}^{(n)j,k} s^q(\alpha) \left[\frac{B p}{p+1} r^{p+1}(\beta) \int_\beta^\alpha r^j s^k d\mu - \frac{B p}{p+1} \int_\beta^\alpha r^{j+p+1} s^k d\mu - A s(\alpha) r^j(\beta) \int_\beta^\alpha r^j s^k d\mu + \right.$$

$$\left. + A s(\alpha) \int_\beta^\alpha r^{p+j} s^k d\mu + B \int_\beta^\alpha r^{p+j} s^q d\mu - A s(\alpha) \int_\beta^\alpha r^{p+j} s^k d\mu \right] .$$

$$(2.14)$$

This expression is of the form (2.9) and upon proper treatment of indices yields the recurrence formula, (2.10). From (2.10) of course one finds that the rule for symmetry in the indices (by pairs -(λ, ρ) and (μ, ν)) holds at the $(n+1)^{\text{st}}$ step if it holds at the n^{th}.

The next step in the investigation is the proof of the convergence of the series for t,

$$t = t^{(0)} + \varepsilon t^{(1)} + \varepsilon^2 t^{(2)} + \ldots \tag{2.15}$$

from the expression (2.9) for the functions $t^{(k)}$.

It will be shown that if the functions r and s are bounded for the entire range of their argument by, say, a constant, M,

$$|r| \leq M$$
$$|s| \leq M, \tag{2.16}$$

(which means of course from (2.6b) that the original perturbation functions f and g must be bounded), then the following geometric series may be shown to dominate (2.15),

$$\frac{1}{2}(\alpha - \beta) \sum_{j=0} \varepsilon^j \cdot (4A)^j \cdot M^j. \tag{2.17}$$

This series converges if ε is chosen such that

$$\varepsilon < \frac{1}{4AM}. \tag{2.18}$$

For proof, the terms in the series for $c_0 t$ are evaluated from (2.9):

$$\left| \varsigma_0 t^{(n+1)} \varepsilon^{n+1} \right| \leq \varepsilon^{n+1} \left| \sum_{\lambda+\mu+\rho+\nu=n+1} R^{(n+1)\,\lambda,\mu}_{\rho,\nu} \, M^{\rho+\nu+\lambda+\mu} (\alpha-\beta) \right|$$

or   (2.19)

$$\left| \varsigma t^{(n+1)} \varepsilon^{n+1} \right| \leq \varepsilon^{n+1} M^{n+1} (\alpha-\beta) \sum_{\lambda+\mu+\rho+\nu=n+1} \left| R^{(n+1)\,\lambda,\mu}_{\rho,\nu} \right| .$$

The problem then resolves itself into estimating the expression

$$\sum_{\lambda+\mu+\rho+\nu} \left| R^{(n+1)\,\lambda,\mu}_{\rho,\nu} \right| . \tag{2.20}$$

The estimation is made by summing the recurrence formula (2.10) in terms of absolute values. Furthermore of course only three of the four indices λ, μ, ρ, ν are independent so one may set

$$\lambda = n+1 - \mu - \rho - \nu . \tag{2.21}$$

Finally, to make use of the delta functions, the sum is broken up into the form

$$\sum_{m=0}^{n+1} \sum_{\rho+\nu=m} \sum_{\mu=0}^{n+1-m} \equiv \sum_{m=0}^{n+1} \sum_{\nu=0}^{m} \sum_{\mu=0}^{n+1-m} \tag{2.22}$$

where $\rho = m - \nu$,

which represents correctly the requirement

$0 \leq \mu + \rho + \nu \leq n+1$, where no arrangement is

.

repeated.*

Then from (2.10)

$$\sum_{m=0}^{n+1}\sum_{\nu=0}^{m}\sum_{\mu=0}^{n+1-m}\left|R_{m-\nu,\nu}^{(n+1)\ n+1-\mu-m,\mu}\right| \leq \sum_{m=0}^{n+1}\sum_{\nu=0}^{m}\sum_{\mu=0}^{n+1-m}\left(\left|R_{m-\nu-1,\nu}^{(n)\ n+1-\mu-m,\mu}\left(B\frac{m-\nu-1}{m-\nu}-A\right)\right|+\left|R_{m-\nu,\nu-1}^{(n)\ n+1-m-\mu,\mu}\left(B\frac{\nu-1}{\nu}-A\right)\right|\right)+$$

$$+\sum_{m=0}^{n+1}\sum_{\mu=0}^{n+1-m}\left(\sum_{q=0}^{\mu-1}\left|B\frac{1}{q+1}R_{m,q}^{(n)\ n+1-\mu-m,\mu-1-q}\right|+\sum_{q=0}^{n-m-\mu}\left|B\frac{1}{q+1}R_{q,m}^{(n)\ n-\mu-m-q,\mu}\right|\right).$$

$$(2.23)$$

In this expression, from (2.8)

$$A = \frac{\gamma+1}{4c_o}$$

$$B = \frac{3-\gamma}{4c_o}$$

so that for $\gamma > 1$, $A > B$ and

$$B\frac{\rho-1}{\rho} - A \leq A.$$

$$(2.24)$$

- -

* To prove that

$$\sum_{m=0}^{n+1}\sum_{\rho=m}^{?}\sum_{\mu=0}^{n+1-m}R_{\rho,\nu}^{(n+1)\ n+1-\mu-m,\mu}$$

does include every type of R, it suffices to show that a particular $R_{k,\ell}^{(n+1)1,j}$ (i,j,k,ℓ = definite values such that $i+j+k+\ell = n+1$) can appear in one and only one way. In other words

m can only equal k
" " " " ℓ $\Rightarrow \nu \leq m$ as required,
and " " " j $\Rightarrow \mu \leq n+1-m$ as required.

Then, by replacing $\dfrac{1}{q+1}$ by 1 in (2.23), and by showing

that in each of the form sums, expressions of the type,

$$\sum_{\lambda+\mu+\rho+\nu=n} \left| R^{(n)} \begin{matrix} \lambda,\mu \\ \rho,\nu \end{matrix} \right| \qquad \text{hold,}$$

(the proof in each case is the same as that at the bottom of

page 19), one achieves an evaluation of (2.20)

$$\sum_{\lambda+\mu+\rho+\nu=n+1} \left| R^{(n+1)} \begin{matrix} \lambda,\mu \\ \rho,\nu \end{matrix} \right| \;\leq\; 4A \sum_{\lambda+\mu+\rho+\nu=n} \left| R^{(n)} \begin{matrix} \lambda,\mu \\ \rho,\nu \end{matrix} \right|. \qquad (2.25)$$

So that if $T^{(n)}$ is an upper bound at the n^{th} stage,

$$\sum_{\lambda+\mu+\rho+\nu=n+1} \left| R^{(n+1)} \begin{matrix} \lambda,\mu \\ \rho,\nu \end{matrix} \right| \;\leq\; T^{(n+1)} \;\leq\; 4AT^{(n)} \;\leq\; \cdots \;\leq\; (4A)^{n+1} R^{(0)}{}^{0,0}_{0,0} = (4A)^{n+1} \tfrac{1}{2}$$

Finally then, from (2.19),

$$\left| c_0 t^{(n+1)} \varepsilon^{n+1} \right| \;\leq\; \varepsilon^{n+1} M^{n+1} (\alpha - \beta \lambda (4A)^{n+1}. \; 1/2 \qquad (2.26)$$

so that (2.17) does represent a dominant series for (2.15),

requiring a restriction of ε of the form (2.18) for con-

vergence, and the proof is completed.

Illustrative example

The points discussed so far in this section will be

illustrated with reference to a particular simple example where

the function $f(x)$ of equation (2.2) is taken to be zero, and

the function $g(x)$ to be $\cos x$.

$$\text{Thus at } t = 0 \quad \begin{cases} u = 0 \\ c = c_0(1 + \varepsilon \cos x) \end{cases} \qquad (2.27)$$

The general behavior of an initial periodic disturbance of this sort such as, for example, the development of the higher order harmonics and later the tendency of shocks to appear is of course of some interest in itself.

1. Usual perturbation solution

In the introduction it was mentioned that the usual type of perturbation solution in which only the dependent quantities u and c are expressed as perturbation series often is unsatisfactory. The particular way in which the solution is inadequate for this example problem will be demonstrated below.

The equations for plane wave propagation referred to x and t as independent variables are

$$c_t + uc_x + \frac{\gamma - 1}{2} cu_x = 0$$

$$cc_x + \frac{\gamma - 1}{2}(u_t + uu_x) = 0.$$

$$(2.28)$$

In the usual perturbation scheme a solution to (2.28) subject to the initial conditions of (2.27) is attempted in the form

$$c = c^{(0)}(x,t) + \varepsilon c^{(1)}(x,t) + \varepsilon^2 c^{(2)}(x,t) + \ldots$$

$$u = u^{(0)}(x,t) + \varepsilon u^{(1)}(x,t) + \varepsilon^2 u^{(2)}(x,t) + \ldots$$

$$(2.29)$$

After the details have been worked out, the resulting perturbation functions become

$$c^{(0)} = c_0$$

$$u^{(0)} = 0$$

$$(2.30)$$

$$c^{(1)} = \frac{c_0}{2}\left[\cos(x + c_0 t) + \cos(x - c_0 t)\right]$$

$$u^{(1)} = \frac{c_0}{\delta-1}\left[-\cos(x + c_0 t) + \cos(x - c_0 t)\right]$$

$$c^{(2)} = \frac{N}{2c_0}\left[\cos 2x - \cos 2c_0 t + 1 - \frac{1}{2}\cos 2(x + c_0 t) \frac{1}{2}\cos 2(x - c_0 t)\right] +$$

$$Mt\left[\sin 2(x + c_0 t) - \sin 2(x - c_0 t)\right]$$

$$u^{(2)} = \frac{N}{2c_0(\delta-1)}\left[\cos 2(x + c_0 t) - \cos 2(x - c_0 t)\right]$$

$$- \frac{2M}{\delta-1}\, t\left[\sin 2(x + c_0 t) + \sin 2(x - c_0 t)\right]$$

$$\text{where } M = -\frac{c_0^2}{4}\left(\frac{\gamma+1}{2(\gamma-1)}\right)$$

$$N = -\frac{c_0^2}{2}\left(\frac{\gamma-3}{2(\delta-1)}\right)$$

$$c^{(3)} = a_1\cos 3(x + c_0 t) + a_2\cos 3(x - c_0 t) + a_3\cos(x + c_0 t) +$$

$$a_4\cos(x - c_0 t) + a_5\cos(3x + c_0 t) +$$

$$a_6\cos(3x - c_0 t) + a_7\cos(x + 3c_0 t) + a_8\cos(x - 3c_0 t) +$$

$$+ t\left[b_1\sin 3(x + c_0 t) + b_2\sin 3(x - c_0 t) + b_3\sin(x + c_0 t) +\right.$$

$$b_4\sin(x - c_0 t) + b_5\sin(3x + c_0 t) + b_6\sin(3x - c_0 t) +$$

$$\left. b_7\sin(x + c_0 t) + b_8\sin(x - 3c_0 t)\right] +$$

$$+ t^2\left[c_1\cos 3(x + c_0 t) + c_2\cos 3(x - c_0 t) + c_3\cos(x + c_0 t) +\right.$$

$$c_4\cos(x - c_0 t) + c_5\cos(3x + c_0 t) + c_6\cos(3x - c_0 t) +$$

$$\left. c_7\cos(x + 3c_0 t) + c_8\sin(x - 3c_0 t)\right] ,$$

where a_1, b_1, c_1 are constants determinable from the equations
and initial conditions, and where the function $u^{(3)}$ has the
same form with different constants.

$c^{(4)}$ has terms of the form:

constant, $\cos 2x$, $\cos 4x$, $\cos(2x \pm 2c_0 t)$, $\cos(2x \pm 4c_0 t)$,

$\cos(4x \pm 2c_0 t)$, $\cos(4x \pm 4c_0 t)$, $\cos 4c_0 t$, $\cos 2c_0 t$,

$+ t$ times sines of the same arguments,

$+t^2$ "   "   "   "   "   "

$+t^3$ "   "   "   "   "   "   .

     The inadequacy of such a solution appears as t becomes
large, when the dominant terms in (2.29) become for example

$$c = c_0 + \varepsilon \left[c^{(1)} + \varepsilon t(\ ) + \varepsilon^2 t^2(\ ) + \ldots \right]. \qquad (2.31)$$

For $t = O(\frac{1}{\varepsilon})$ series (2.31) no longer converges in the pertur-
bation sense, and in this sense the solution fails since every
term in the bracketed expression becomes $O(1)$. The critical
fact is that exactly this order of t holds at the region of
shock development (see for example page 37) and thus the usual
perturbation solution cannot hold into the region of shock
development.

    2.   <u>Perturbation solution in characteristic coordinates</u>

    If the same problem (initial conditions (2.27)) is
solved by the method described earlier in this section, the
perturbation functions are found as,

$$u^{(0)} = 0$$

$$c^{(0)} = c_0$$

$$u^{(1)} = \frac{c_0}{\gamma - 1}(\cos\beta - \cos\alpha)$$

$$c^{(1)} = \frac{c_0}{2}(\cos\beta + \cos\alpha)$$

$$\left. \begin{array}{l} u^{(j)} = 0 \\ c^{(j)} = 0 \end{array} \right\} \text{ for } j > 1.$$

(2.32)

Thus
$$u^{(1)} + c^{(1)} = 2c_0(\overline{A}\cos\beta - \overline{B}\cos\alpha)$$

$$u^{(1)} - c^{(1)} = 2c_0(\overline{B}\cos\beta - \overline{A}\cos\alpha)$$

, where
$$\overline{A} = \frac{\gamma + 1}{4(\gamma - 1)}$$

$$\overline{B} = \frac{3 - \gamma}{4(\gamma - 1)}$$

are to be used in finding

$$x = x^{(0)} + \epsilon x^{(1)} + \epsilon^2 x^{(2)} + \dots$$

$$t = t^{(0)} + \epsilon t^{(1)} + \epsilon^2 t^{(2)} + \dots ,$$

(2.33)

from the equations

$$x_\alpha = (u + c)t_\alpha$$

$$x_\beta = (u - c)t_\beta$$

with $t = 0$ on $x = \alpha = \beta$.

The resultant solutions are

$$x^{(0)} = \frac{\alpha + \beta}{2}$$

(2.34)

$$c_0 t^{(0)} = \frac{\alpha - \beta}{2}$$

$$x^{(1)} = \frac{\alpha - \beta}{2}(\cos\beta - \cos\alpha)\overline{A}$$

$$c_0 t^{(1)} = \frac{\alpha - \beta}{2}(-\cos\beta - \cos\alpha)\overline{A} + (\sin\alpha - \sin\beta)\overline{B}$$

$$x^{(2)} = \frac{\alpha - \beta}{2}(\cos 2\alpha - \cos 2\beta)(\frac{\overline{A}^2}{2} + \frac{\overline{A}\overline{B}}{4}) +$$

$$3\frac{\overline{A}\overline{B}}{4}(2\cos\alpha\sin\beta + 2\cos\beta\sin\alpha - \sin 2\beta - \sin 2\alpha)$$

$$c_0 t^{(2)} = \frac{\alpha-\beta}{2}(\cos 2\alpha + \cos 2\beta)(\frac{\bar{A}^2}{2} - \frac{\overline{AB}}{4}) + \frac{\alpha-\beta}{2}(\cos\alpha\cos\beta)2\bar{A}^2 +$$

$$\frac{\alpha-\beta}{2}(\bar{A}^2 + 2\bar{B}^2 - AB) + \text{terms not multiplied by } (\alpha-\beta).$$

$$x^{(3)} = \frac{\alpha-\beta}{2}(\cos 3\beta - \cos 3\alpha)(\quad) \text{ etc.} \dots$$

$$\dot{x}^{(4)} = \frac{\alpha-\beta}{2}(\cos 4\beta - \cos 4\alpha)(\quad) \text{ etc.} \dots$$

The form assumed by successive terms is apparent. In particular only the first power of $(\alpha-\beta)$ appears, and $\frac{\alpha-\beta}{2}$ is the initial approximation to t. It thus seems possible to continue the solution beyond the point where t becomes $O(\frac{1}{\epsilon})$. That this _is_ indeed possible is shown in section 2 where the details of the process are explored.

At this point it is of some interest to remark that since (2.32) and (2.34) constitute a correct solution to the problem, they must agree with the usual perturbation solution of (2.30) and also with the solution achieved using Riemann's function in all cases where the latter two solutions are obtainable and valid.

For the case of the usual perturbation solution the agreement may be demonstrated simply by introducing the coordinate perturbations of (2.33) and (2.34) into the solution (2.38) and showing that this causes the higher order perturbations $(j > 1)$ in u and c to become zero in agreement with (2.32). This has been checked for the cases of $u^{(2)}$ and $c^{(2)}$.

For the case where the solution is given in terms of Riemann's function, the solution may be shown to be (c.f. section 82 of [4])

$$t(\alpha, \beta) = t(\xi(\alpha), \eta(\beta)) = \int_\Gamma \frac{V(\lambda)}{2C(\lambda)} \, d\lambda,$$

where

$$c(\lambda) = c_0(1 + \varepsilon g(\lambda)),$$

and where the point $\left\{ \begin{array}{l} \tilde{r} = \eta(\beta) \\ \tilde{s} = \xi(\alpha) \end{array} \right\}$ is

the point, P, in the $(\tilde{r}, \tilde{s})$-plane of the figure corresponding to the point (α, β) in the (α, β)-plane. The functions $\tilde{r}$ and $\tilde{s}$ on the curve Γ are

$$\tilde{r}(\alpha) = \frac{c_0}{\gamma - 1} + \varepsilon r(\alpha)$$

$$\tilde{s}(\alpha) = \frac{c_0}{\gamma - 1} + \varepsilon s(\alpha),$$

so that $\tilde{r}$ and $\tilde{s}$ represent the result of restoring the terms of order one to the perturbation functions, r and s, of equations (2.6b).

In the expression for $t(\alpha, \beta)$ the function $V(\lambda)$ is Riemann's function, and for this problem

$$V = \left(\frac{\xi + \eta}{\tilde{r} + \tilde{s}} \right)^{-1/2\mu^\lambda} F\left(1 - \frac{1}{2\mu^\lambda}, \frac{1}{2\mu^\lambda}, 1, z\right)$$

where F is the hypergeometric function and where

$$\mu^\lambda = \frac{\gamma - 1}{\gamma + 1}$$

$$z = -\frac{(\tilde{s} - \xi)(\tilde{r} - \eta)}{(\tilde{s} + \tilde{r})(\xi + \eta)}.$$
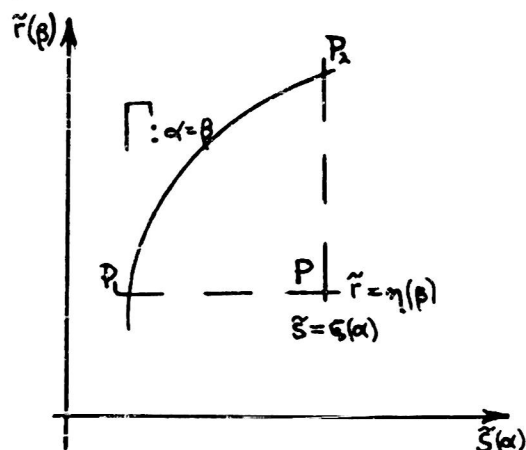
Now if, at this stage, the problem is further simplified by assuming that $\frac{1}{2\mu^2}$ is an integer, the hypergeometric function, F, becomes a finite series. For example by choosing $\gamma = 1.4$, $\frac{1}{2\mu^2}$ becomes equal to 3, and gives

$$F = 1 - 6z + 6z^2.$$

Then using this F in the expression for $t(\alpha, \beta)$ and expanding the result in powers of ε such that

$$c_o t = c_o t^{(0)} + \varepsilon c_o t^{(1)} + \ldots,$$

one obtains

$$c_o t^{(0)} = \frac{\alpha - \beta}{2}$$

$$c_o t^{(1)} = -3/2(\alpha - \beta)(\cos\alpha + \cos\beta) + (\sin\alpha - \sin\beta)$$

in agreement with the previous solution of (2.34) since for $\gamma = 1.4$

$$\overline{A} = \frac{\gamma + 1}{4(\gamma - 1)} = 3/2$$

$$\overline{B} = \frac{3 - \gamma}{4(\gamma - 1)} = 1.$$

Actually, so far as the details are concerned, the expansion in powers of ε as a perturbation series which arises out of terms of the sort

$$\frac{1}{\tilde{s}(\alpha) + \tilde{r}(\alpha)} = \frac{1}{\frac{2c_o}{\gamma - 1} + \varepsilon(r(\alpha) + s(\alpha))}$$

is valid only so long as

$$\left| \varepsilon(r(\alpha) + s(\alpha)) \right| \leq 2\varepsilon M < \frac{2c_o}{\gamma - 1},$$

where M is an upper bound on the functions, r and s.

For $A = \frac{\gamma+1}{4c_o}$ (see (2.8)) this means

$$\varepsilon < \frac{1}{4\mu^2 AM} \ .$$

Comparison of this inequality with the criterion of (2.18)

$$\varepsilon < \frac{1}{4AM} \ ,$$

shows that (2.18) does give a safe bound on ε , since for $\gamma > 1$

$$\frac{1}{\mu^2} > 1 \ .$$

What this requirement on ε really means in terms of the allowed initial departure of c from uniformity may be found by solving equations (2.6b) to find

$$c_o g(x) = \frac{\gamma-1}{2} (r(x) + s(x))$$

or

$$\varepsilon c_o |g| \leq (\gamma-1) \varepsilon M < \frac{\gamma-1}{4A} = (\frac{\gamma-1}{\gamma+1}) c_o \ .$$

Thus the initial perturbation ratio for $\gamma = 1.4$ may be

$$\frac{\varepsilon c_o |g|}{c_o} < \frac{\gamma-1}{\gamma+1} = \frac{1}{6} \ ,$$

or, in terms of the disturbance, ρ', to the density ρ_o:

$$\frac{\rho'}{\rho_o} < 1.16,$$

as may be found from the relation

$$(1 + \frac{\rho'}{\rho_o}) = (1 + \frac{c'}{c_o})^{\frac{2}{\gamma-1}} \ .$$

Additional Example

As further evidence of the advantages accruing
to the method of coordinate perturbation, another example
will be considered.

The problem concerns a piston moving back and forth
periodically in a semi-infinite cylinder. The velocity of the
piston is given as $u_p = \varepsilon \sin \omega t$.

Now if the underline{usual} type of perturbation solution for
u and c is obtained through the first order perturbations,
and if the flux of mass past any given section is integrated
over an integral number of periods of the motion,

$$\text{mass flux} = \int_0^T \rho u \, dt, \tag{2.35}$$

it will be found that there is a net mass flux outwards! Ob-
viously this is in error, since there cannot be a continuous
flow of matter away from the piston.

Actually, for one period, the mass flux average is:

$$\text{av. } \rho u = \frac{\varepsilon^2 \rho_0}{2 c_0 \omega} \quad , \quad \text{where } \begin{array}{l} \rho_0 = \text{av. density} \\ c_0 = \text{av. speed of sound.} \end{array} \tag{2.36}$$

That is, the quantity is of second order, and when the second
order corrections to u and $c(\rho)$ have been obtained and included,
the mass flux reduces correctly to zero. However, this addi-
tional computation required makes the task considerably more
arduous. Also often in practice first order quantities are
used to estimate say energy flux and so on (c.f. a recent

discussion and justification of this practice by A. Schock [17]), and in this problem of the piston the energy flux cannot be computed correctly from first order quantities; second order quantities are required to make the energy flux correctly balance the work done at the piston.

However, if the problem is described in terms of its characteristic variables, and if the variables x and t are also considered in perturbation form by the methods of this investigation, first order quantities will yield correct results for both mass and energy flux.

Briefly the results of the calculations are as follows.

Case 1) Ordinary perturbation solution

A solution of the form

$$u = u^{(0)}(x,t) + \varepsilon u^{(1)}(x,t) + \varepsilon u^{(2)}(x,t) + \ldots$$

$$c = c^{(0)}(x,t) + \varepsilon c^{(1)}(x,t) + \varepsilon c^{(2)}(x,t) + \ldots$$

is sought for equations (2.28) under the boundary conditions that the velocity of the fluid at the piston be $u = \varepsilon \sin\omega t$, and that the solution contain only outward travelling waves.

The solution is:

$$u^{(0)} = 0$$

$$c^{(0)} = 0 \qquad\qquad\qquad\qquad (2.37)$$

$$u^{(1)} = \sin\omega\left(t - \frac{x}{c_o}\right)$$

$$c^{(1)} = \frac{\gamma-1}{2}\sin\omega\left(t - \frac{x}{c_o}\right)$$

$$c_o u^{(2)} = -\frac{1}{2} + \cos\omega(t - \frac{x}{c_o}) - \frac{1}{2}\cos 2\omega(t - \frac{x}{c_o}) + \frac{\gamma+1}{4}\frac{\omega}{c_o}x\sin 2\omega(t - \frac{x}{c_o})$$

$$c_o o^{(2)} = (\frac{\gamma-1}{2})\left[\cos\omega(t - \frac{x}{c_o}) - \frac{1}{2}\cos 2\omega(t - \frac{x}{c_o}) + \frac{\gamma+1}{4}\frac{\omega}{c_o}x\sin 2\omega(t - \frac{x}{c_o})\right].$$

For the mass flux, from (2.35)

$$\text{average mass flux} = \frac{1}{T}\int_0^T \rho u\, dt = \frac{1}{T}\int_0^T (\rho^{(0)} + \varepsilon\rho^{(1)})(u^{(0)} + \varepsilon u^{(1)})\, dt =$$

where $\quad \frac{\rho}{\rho_o} = (\frac{c}{c_o})^{\frac{2}{\gamma-1}}$. $\qquad\qquad\qquad \frac{\varepsilon^2\rho_o}{2c_o\omega}$.

If second order terms are included:

$$\frac{1}{T}\int_0^T (\rho^{(0)} + \varepsilon\rho^{(1)} + \varepsilon^2\rho^{(2)})(u^{(0)} + \varepsilon u^{(1)} + \varepsilon^2 u^{(2)})\, dt = 0 + \text{order } \varepsilon^3.$$

For the flux at energy,

given
$\begin{cases}
m = \rho u = \text{mass flux} \\
e = \text{internal energy} = C_v T = \frac{1}{\gamma-1}\frac{p}{\rho} \text{ (for the polytropic case)} \\
c^2 = \frac{\gamma p}{\rho} \\
p = \text{pressure}
\end{cases}$

the flux of energy is

$$m(\frac{1}{2}u^2 + e) + up = m(\frac{1}{2}u^2 + \frac{1}{\gamma-1}\frac{p}{\rho} + \frac{p}{\rho}) = m(\frac{1}{2}u^2 + \frac{1}{\gamma-1}c^2) \ . \qquad (2.38)$$

The work done by the piston is the product pu at the piston.

Then, provided the second order terms in (2.37) are included, one may prove that

$$\left[\text{average energy flux at any point} = \text{average work done by piston} = \varepsilon^2\frac{\rho_o c_o}{2}\right]. \qquad (2.39)$$

Case 11)   <u>Coordinate perturbation solution</u>

A solution of the form (2.3) is sought for equations (2.1) under the conditions,

<u>on the piston defined as $t = \alpha = \beta$:</u>

$$x^{(0)} = 0 \qquad t^{(0)} = \alpha = \beta \qquad u^{(0)} = 0$$
$$x^{(1)} = \frac{1}{\omega}(1 - \cos\omega t) \quad t^{(k)} = 0,\ k > 0 \qquad u^{(1)} = \frac{dx^{(1)}}{dt} = \sin\omega t$$
$$x^{(k)} = 0,\ k > 1 \qquad\qquad\qquad\qquad u^{(k)} = 0,\ k > 1$$

$$(2.40)$$

<u>at the curve $\beta = 0$</u> which is the characteristic forming

the boundary between the disturbed

and undisturbed regions,

$$x^{(k)} = c_0 t^{(k)} \qquad u^{(k)} = 0,\ \text{all } k$$
$$c^{(0)} = c_0 \qquad c^{(k)} = 0,\ k > 0.$$

$$(2.41)$$

The solution is

$$u^{(0)} = 0 \qquad,\qquad c^{(0)} = c_0$$
$$u^{(1)} = \sin\omega\beta \qquad,\qquad c^{(1)} = \frac{\gamma-1}{2}\sin\omega\beta$$
$$u^{(k)} = 0 \qquad,\qquad c^{(k)} = 0,\ k > 1$$

$$x^{(0)} = \frac{c_0}{2}(\alpha - \beta)$$

$$(2.42)$$

$$c_0 t^{(0)} = \frac{c_0}{2}(\alpha + \beta)$$

$$x^{(1)} = \frac{1}{\omega} + \frac{\gamma+1}{8}\left[(\alpha - \beta)\sin\omega\beta - \frac{1}{\omega}\cos\omega\alpha + \frac{\gamma-7}{\gamma+1}\frac{1}{\omega}\cos\omega\beta\right]$$

$$c_0 t^{(1)} = \frac{\gamma+1}{8}\left[-(\alpha - \beta)\sin\omega\beta - \frac{1}{\omega}\cos\omega\alpha + \frac{1}{\omega}\cos\omega\beta\right].$$

The second order perturbations are not required.

(Incidentally a proof of the convergence of the perturbation series for this case has been worked out, but will not

be given since the details follow closely those of the proof
for the initial value problem. For this boundary problem,
given a case where the perturbation to the piston motion is
bounded by a constant M, the requirement on ε is found to be

$$\varepsilon < \frac{4}{M}(\frac{1}{7-\delta}) \cdot) \tag{2.43}$$

For case ii) the integrations for mass and energy
flux must be carried out along the curve in the $(\alpha-\beta)$-plane which
correctly represents a constant x location. When this is done,
only the first order solutions of (2.42) need be used to predict
zero mass flux and correct energy balance. A very definite
saving in effort is effected, since the complexity of the compu-
tation greatly increases at the higher order perturbations.

Section 2: Shock development

In the solution to a problem of one-dimensional wave
propagation a compression wave may appear which, steepening as
it travels, forms ultimately a shock front. For the case where
the shock develops in a simple wave region, Friedrichs has shown
[6] that the solution may be continued with second order accuracy
as a simple wave solution through the shock, so long as the shock
is weak, since the neglected change in entropy is of third order
in the shock strength.

We wish to show that a similar approach may be used
when a shock forms in a region which is not a simple wave region,

but which needs both sets of characteristic variables for its
description. In this section the type of perturbation solution
in terms of characteristics found in the previous section will
be studied from the point of view of its ability to describe the
flow at the region of shock development and even somewhat beyond.

In general the development of a shock in a flow
described by characteristic variables is characterized by the
fact that the mapping from the characteristic plane to the
physical plane ceases to be single valued; the image of the
characteristic plane folds over to form a three-sheeted surface
in the (x,t)-plane. At the edges of the fold the Jacobian,

$$J = x_\alpha t_\beta - x_\beta t_\alpha \qquad (2.44)$$

is equal to zero, and within the region the velocity and density
at any point (x,t) are triple-valued. This paradox is resolved
by the introduction of a shock, since the jump in the values of
velocity or density between the outermost sheets is condoned if
a shock wave intervenes.

General descriptions of the geometry of the situation
are to be found in Craggs [5], Stocker and Meyer [19], and
Meyer [15]. The second problem of introducing a shock front in the
correct way to restore the right solution has been studied usually
for specific cases. As noted above, Friedrichs [4] has considered
the simple wave case. Stocker [18] considered a particular
situation involving a gas of adiabatic exponent, 5/3. Whitham
[23], [24] has studied the development of shocks in the spherical

and axi-symmetrical cases by using coordinate perturbations of
the type considered in this paper. However, he considers the
nonlinear deviations of only one set of characteristics, and
does not consider the other set, and thus really deals with
the space analogue of a simple wave.

If, on the other hand, the deviation of both sets of
characteristics from straight lines is considered, as is done
in section 1, considerably more general types of problems should
be solvable. In the following the series in terms of charac-
teristic variables which were worked out for the case of a plane
wave in section 1 are shown to converge even in the region where
the mapping becomes multiple-valued. Then, just as for the case
of simple waves, the series may be used to extend the solution
beyond the point of shock wave incidence with an error depending
only on neglect of entropy.

Development of the envelope of characteristics

In order to locate the region where the multiple-
covering sets in, the Jacobian (2.44) is considered. Further-
more only the cases where the shock develops initially from one
set of characteristic variables is treated. By this is meant
simply that the second set of characteristics, which is treated
in the fully nonlinear fashion, does not form an envelope at
exactly the same time as does the first set. Specifically it is
assumed that the multiple-valuedness occurs along the β-charac-
teristics whose images in the (x, t)-plane form an envelope de-
fined by

$$\frac{\partial x(\alpha,\beta)}{\partial \beta} = 0 \tag{2.45}$$

Then from equations (2.1), for $(u - c) \neq 0$,

$$\frac{\partial t(\alpha,\beta)}{\partial \beta} = 0, \tag{2.46}$$

and the Jacobian

$$J = x_\alpha t_\beta - x_\beta t_\alpha = 0, \tag{2.47}$$

so that the mapping of the (α,β)-plane into the (x,t)-plane is no longer one-to-one.

Then, given a perturbation solution of the type

$$c_0 t = c_0 t^{(0)} + \varepsilon c_0 t^{(1)} + \varepsilon^2 c_0 t^{(2)} + \ldots,$$

(2.46) becomes

$$\frac{\partial c_0 t}{\partial \beta} = \frac{\partial c_0 t^{(0)}}{\partial \beta} + \varepsilon \frac{\partial c_0 t^{(1)}}{\partial \beta} + \varepsilon^2 \frac{\partial c_0 t^{(2)}}{\partial \beta} + \ldots = 0 \tag{2.48}$$

(2.48) can hold only when the factor, $\dfrac{\partial(c_0 t^{(2)})}{\partial \beta}$, of ε becomes of order $\dfrac{1}{\varepsilon}$ so that the second term of the series can balance the first. To see what this means in terms of the variables α and β, consider the perturbation functions given by the general form (2.9). For the first terms one finds:

$$c_0 t = \frac{\alpha - \beta}{2} + \varepsilon\left[(\alpha-\beta)R_{1,0}^{(1)0,0}\Big(r(\beta)+s(\alpha)\Big) + R_{0,0}^{(1)1,0}\int_\beta^\alpha \Big(r(\xi)+s(\xi)\Big)d\xi\right] + \varepsilon^2\binom{at\ most}{O(\alpha-\beta)M^2} + \cdots$$

where from (2.16) the functions r and s are bounded by M.

Then

$$\frac{\partial c_0 t}{\partial \beta} = -\frac{1}{2} + \varepsilon \left[R^{(1)}{}_{1,0}^{\,0,0} \left((\alpha - \beta) \frac{\partial r(\beta)}{\partial \beta} - \left(r(\beta) + s(\alpha) \right) \right) - R^{(1)}{}_{0,0}^{\,1,0} \left(r(\beta) + s(\beta) \right) \right] +$$

$$+ \varepsilon^2 \left(\text{at most } O\left((\alpha - \beta) S M \right) \right), \tag{2.49}$$

where
$$\left| \frac{\partial r(\mu)}{\partial \mu} \right| \leq S$$

$$\left| \frac{\partial s(\mu)}{\partial \mu} \right| \leq S$$

is required. (2.50)

So if the initial functions have derivatives satisfy-
ing (2.50) for the entire range of their arguments, one can have
$\frac{\partial c_0 t}{\partial \beta} = 0$ only for

$$(\alpha - \beta) = O(\tfrac{1}{\varepsilon}), \tag{2.51}$$

and a shock could be expected for large α and/or β correspond-
ing to large t. The crucial fact involved here is that the
perturbation series converges beyond this point. If the power
of $(\alpha - \beta)$ appearing in the higher order terms of the perturbation
series had increased, the convergence of the series under condi-
tion (2.51) would fail, but under a situation of properly bounded
initial functions, equation (2.18) shows that only the first
power of $(\alpha - \beta)$ enters for any perturbation function and the
convergence persists.

Geometry of the shock development region

The correct introduction of a shock into the region
of multiple-valued solutions requires some exploration of the
geometry of the mapping of the (α, β)-plane into the (x, t)-plane
in the region. In particular the earliest point in x and t at

which the envelope appears is of interest. Such an extremum
for x is given by

$$dx = \frac{\partial x}{\partial \alpha}d\alpha + \frac{\partial x}{\partial \beta}d\beta = 0, \tag{2.52}$$

or along the envelope defined by (2.45)

$$\frac{dx}{d\beta} = \frac{\partial x}{\partial \alpha} \frac{d\alpha}{d\beta} = 0. \tag{2.53}$$

Since from the assumption that a shock does not form in the
other direction,

$$\frac{\partial x}{\partial \alpha} \not= 0, \tag{2.54}$$

the extremum is given by

$$\frac{d\alpha}{d\beta} = 0. \tag{2.56}$$

Finally, since from the equations (2.1) for $(u - c) \not= 0$

$$\frac{\partial x}{\partial \beta} = 0 \implies \frac{\partial t}{\partial \beta} = 0,$$

the extremum for both x and t is given by (2.56).

For simplicity, the variables of the problem are now
shifted to make the extremum of the envelope occur at $x = t = 0$
in the (x,t)-plane and at $\alpha = \beta = 0$ in the (α,β)-plane. An
expansion of the functions x, t, u, c in terms of α and β near
this extremum is then made in the form

$$x = x_{10}\alpha + x_{11}\alpha\beta + x_{20}\alpha^2 + x_{02}\beta^2 + x_{12}\alpha\beta^2 + x_{21}\alpha^2\beta + x_{30}\alpha^3 + x_{03}\beta^3 + \ldots$$

$$t = t_{10}\alpha + t_{11}\alpha\beta + \ldots$$

$$u = \varepsilon(u_{00} + u_{10}\alpha + u_{01}\beta + \ldots)$$

$$c = c_0 + \varepsilon(c_{00} + c_{10}\alpha + c_{01}\beta + \ldots) \tag{2.57}$$

where x_{10}, etc., are constants, and where the fact $\frac{\partial x}{\partial \rho} = \frac{\partial t}{\partial \rho} = 0$ near the extremum, $\alpha = \beta = 0$, has been used.

Also it may be shown that at the extremum,

$$x_{\rho\rho} = t_{\rho\rho} = 0 \tag{2.58}$$

so that the envelope is cusped..

The proof of (2.58) follows from (2.56) which shows that the image of the envelope in the (α,β)-plane has an expansion of the form

$$\alpha = k\beta^2 + 0(\beta^3) + \ldots, \quad k = \text{constant} \tag{2.59}$$

Then from (2.57)

$$x_\rho = x_{11}\alpha + 2x_{02}\beta + 2x_{12}\alpha\beta + 3x_{03}\beta^2 + \ldots ,$$

or along (2.59)

$$x_\rho = x_{11}k\beta^2 + 2x_{02}\beta + 2x_{12}k\beta^3 + 3x_{03}\beta^2 + 0(\beta^3) . \tag{2.60}$$

If (2.60) is to represent x_ρ correctly for small finite distances in β along the locus, $x_\rho = 0$, then the coefficient of β must vanish,

$$x_{02} = 0, \tag{2.61}$$

and the terms in β^2, β^3 etc. must balance, e.g.

$$x_{11}k = -3x_{03}. \tag{2.62}$$

Relations of the type (2.62) are demonstrated in a later example where the series (2.57) are given explicitly, (page49).

From (2.61) and similar considerations for t, the equation (2.58) is proved and the envelope is cusped. The series (2.57) become

$$x = x_{10}\alpha + x_{11}\alpha\beta + x_{20}\alpha^2 + x_{12}\alpha\beta^2 + x_{21}\alpha^2\beta + x_{03}\beta^3 + x_{30}\alpha^3 + \ldots$$

$$t = t_{10}\alpha + t_{11}\alpha\beta + t_{20}\alpha^2 + t_{12}\alpha\beta^2 + \ldots$$

$$u = \varepsilon\left[u_{00} + u_{10}\alpha + u_{01}\beta + \ldots\right] \tag{2.57'}$$

$$c = c_0 + \varepsilon\left[c_{00} + c_{10}\alpha + c_{01}\beta + \ldots\right] .$$

For reference in the discussion sketches of the mapping near the cusp are shown in Fig. 1. In 1A is shown the image of the envelope, (2.59), in the (α, β)-plane. 1B shows the envelope in the (x, t)-plane and includes sketches of the triple fold. 1C and 1D plot $x(\beta)$ and $t(\beta)$ for constant α, and show the increase in the area of the folded region as α increases from its value at the cusp.

Location of the shock wave

The triple mapping leads one to examine the possibility of introducing a shock front which will allow the jumps in velocity and density between the outer sheets of the fold and which will allow therefore a continuation of the solution through the shock. These remarks apply of course only to regions of weak shock since the entropy change through the shock, which we are tacitly neglecting, affects quantities of the third order in the shock strength.
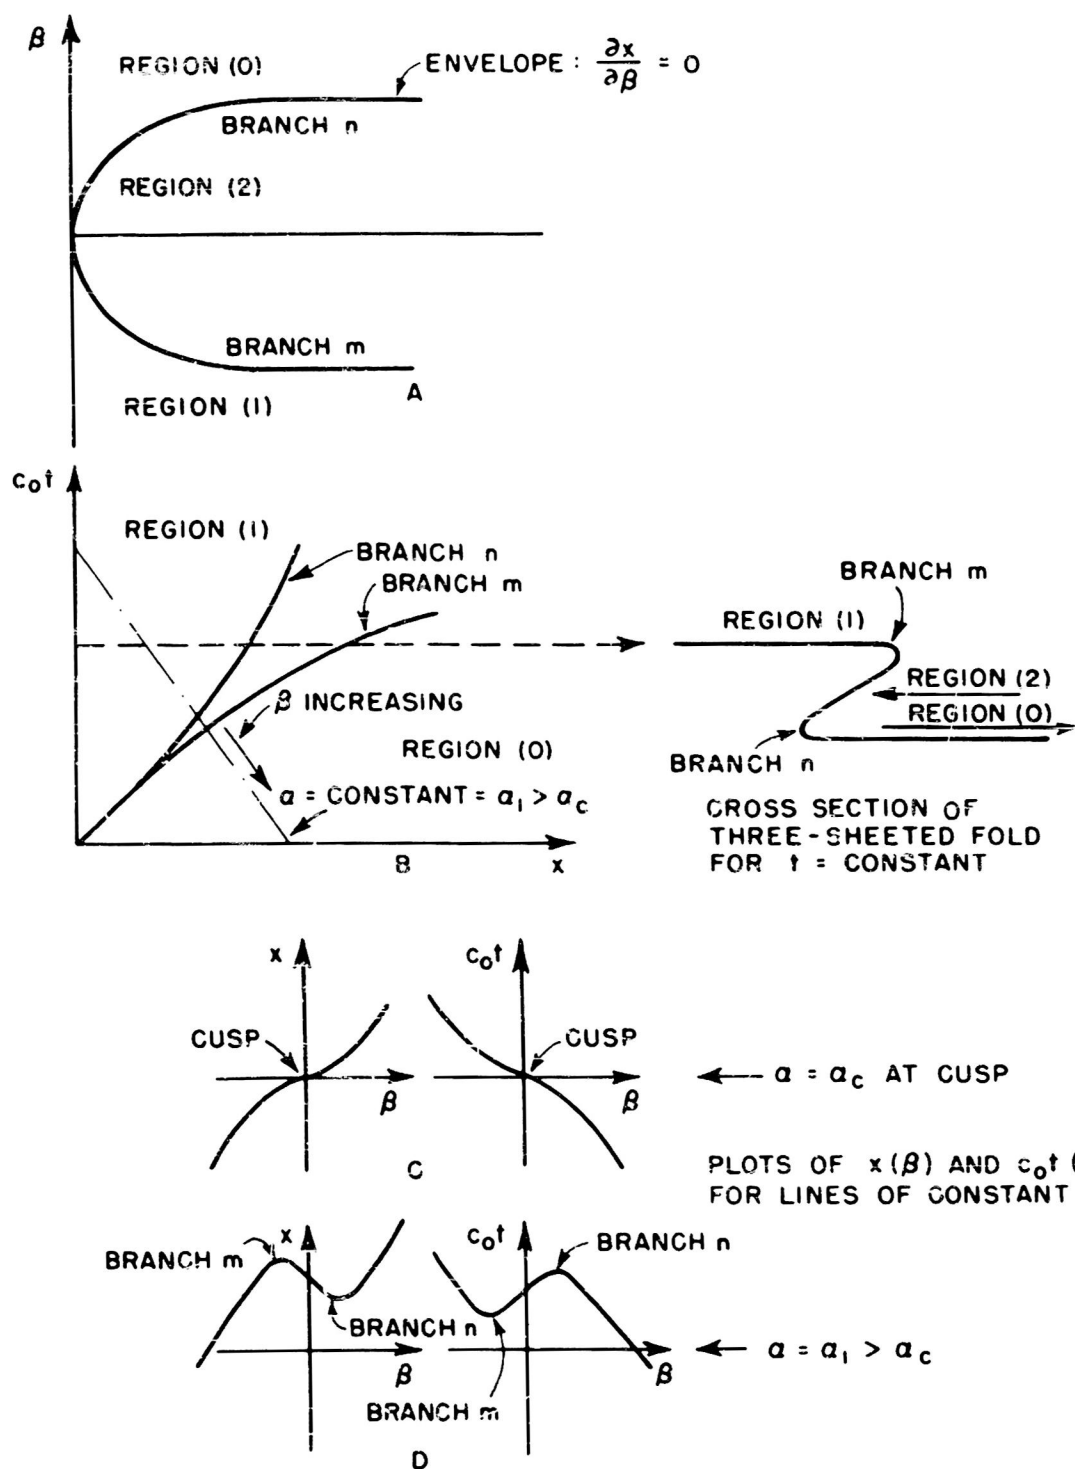
β

REGION (0)   ENVELOPE: $\frac{\partial x}{\partial \beta} = 0$

BRANCH n

REGION (2)

BRANCH m

REGION (1)   A

$c_0 t$

REGION (1)

BRANCH n
BRANCH m

β INCREASING

REGION (0)

$a = \text{CONSTANT} = a_1 > a_c$

B   x

BRANCH m

REGION (1)

REGION (2)
REGION (0)

BRANCH n

CROSS SECTION OF
THREE-SHEETED FOLD
FOR $t = \text{CONSTANT}$

x $c_0 t$

CUSP   CUSP $\longleftarrow a = a_c$ AT CUSP
        β β

C   PLOTS OF $x(\beta)$ AND $c_0 t(\beta)$
FOR LINES OF CONSTANT a

BRANCH m   x $c_0 t$ BRANCH n

BRANCH n $\longleftarrow a = a_1 > a_c$
        β β

BRANCH m

D

FIG. 1   LOCUS OF THE ENVELOPE: $\frac{\partial x}{\partial \beta}(a, \beta) = 0$

The shock is to be located (see Fig. 1A and B) in the (x,t)-plane on the upper sheet (region (1)) just to the left of branch m, corresponding to a location on the lower sheet (region (0)) just to the right of branch n. Thus in the (α,β)-plane the image of the shock falls outside the region (2) and behaves near the origin like

$$\alpha = \overline{K}\beta^2 + \ldots, \text{ where } \overline{K} > k \text{ of equation (2.59).(2.63)}$$

Then for a point (x,t) on the shock on the upper sheet, there must correspond the same point (x,t) on the lower sheet, and the jumps on velocity and density between the two sheets must obey the shock transition equations (Rankine-Hugoniot conditions [4]).

To this end let the shock be represented parametrically by a parameter σ, representing distance along the shock such that, in view of (2.59)

$$\left.\begin{array}{l}\alpha = c_2\sigma^2 + c_3\sigma^3 + \ldots \\[2mm] \hat{\wp} = d_1\sigma + d_2\sigma^2 + d_3\sigma^3 + \ldots \end{array}\right\} \text{ on the upper sheet, and} \quad (2.64a)$$

$$\left.\begin{array}{l}\alpha = e_2\sigma^2 + e_3\sigma^3 + \ldots \\[2mm] \hat{\wp} = f_1\sigma + f_2\sigma^2 + f_3\sigma^3 + \cdots \end{array}\right\} \text{ on the lower sheet,} \quad (2.64b)$$

where c_2, d_1, ... are constants.

In order that points (x,t) on the outer sheets may correspond for a given σ, equations (2.57') show

$$x_{10}(c_2\sigma^2 + c_3\sigma^3) + x_{11}(c_2 d_1\sigma^3) + x_{05}d_1^3\sigma^3 + 0(\sigma^4) = x_{10}(e_2\sigma^2 + e_3\sigma^3) +$$

$$x_{11}(e_2 f_1\sigma^3) + x_{03}f_1^3\sigma^3 + 0(\sigma^4) ,$$

or, from the σ^2 terms,

$$c_2 = e_2. \tag{2.65}$$

The shock transition equations are conservation of mass,

$$\rho_0 v_0 = \rho_1 v_1 = m, \qquad \begin{aligned} v_1 &= u_1 - U \\ U &= \text{shock velocity} \end{aligned} \tag{2.66a}$$

conservation of momentum:

$$\rho_0 v_0^2 + p_0 = \rho_1 v_1^2 + p_1 \tag{2.66b}$$

conservation of energy,

$$\frac{v_0^2}{2} + e_0 + \frac{p_0}{\rho_0} = \frac{v_1^2}{2} + e_1 + \frac{p_1}{\rho_1} \tag{2.66c}$$

Increase of entropy

$$mS_0 \leqslant mS_1 \quad ; \quad S = \text{entropy.} \tag{2.66d}$$

In the solution being considered entropy change is to be neglected which means that the last equation above is irrelevant, and also that the energy equation (2.66c) reduces to Bernoulli's law and is already satisfied by a solution of the original equations (§55, [4]). To satisfy the other equations use is made of equations (2.57'), (2.66), and the further expansion

$$\rho = \rho_0 + \varepsilon(\rho_{00} + \rho_{10}\alpha + \rho_{01}\beta + \rho_{02}\beta^2 + \ldots) \quad (2.67)$$

and (2.66a) is evaluated on the upper and lower sheets along the shock.

Taking the shock velocity as

$$U = U^{(0)} + \varepsilon U^{(1)} + \ldots \quad (2.68)$$

and substituting for the quantities in (2.66a) evaluated on the two sheets of (2.64, a, b) gives as the conditions obtained by setting the coefficients of σ and σ^2 equal to zero respectively,

$$(d_1 - f_1)\left(-\rho_{01}U^{(0)} + (\rho_0 + \varepsilon\rho_{00})u_{01} + \varepsilon\rho_{01}u_{00}\right) = 0$$

$$\quad (2.69, a, b)$$

$$-(d_1 - f_1)\varepsilon\rho_{01}U^{(1)} + (d_1^2 - f_1^2)\left[(\varepsilon\rho_0 + \varepsilon^2\rho_{0c})u_{02} + \varepsilon^2\rho_{01}u_{01}\right.$$

$$\left. -U^{(0)}\varepsilon\rho_{02}\right] = 0$$

In these expressions, the relation $d_1 = f_1$ is not allowed, since in equations (2.64, a, b) β must have different signs on the two outer sheets of the shock (see Fig. 1A). Thus one obtains from (2.69a)

$$U^{(0)} = u_{00} + \left(\frac{\rho_0 + \varepsilon\rho_{00}}{\rho_{01}}\right)u_{01}$$

or since,

$$u_{01} = \frac{2}{\gamma - 1}c_{01} \quad \text{and} \quad \frac{\rho_0 + \varepsilon\rho_{00}}{\rho_{01}} = \frac{\gamma - 1}{2}\frac{(c_0 + \varepsilon c_{00})}{c_{01}}, \quad (2.70)$$

$$U^{(0)} = c_0 + \varepsilon(c_{00} + u_{00}) \quad (2.71)$$

Then one may show from (2.69b) that

$$d_1 = -f_1$$
$$U^{(1)} = 0 \tag{2.72}$$

is a satisfactory solution since to this order the required relation on the shock,

$$\frac{dx/ds}{dt/ds} = U \qquad \text{is satisfied.} \tag{2.73}$$

The equations for the shock become

$$\left.\begin{aligned} \alpha &= c_2 \sigma^2 + \ldots \\ \beta &= d_1 \sigma + \ldots \end{aligned}\right\} \quad \text{on the upper sheet}$$

$$\left.\begin{aligned} \alpha &= c_2 \sigma^2 + \ldots \\ \beta &= -d_1 \sigma + \ldots \end{aligned}\right\} \quad \text{on the lower sheet.}$$

$$(2.74a,b)$$

Furthermore the speed of the shock, that is its slope in the (x,t)-plane is the average of the slopes of the β-characteristics forming the two branches of the envelope. This is shown by using equations (2.1) and (2.57') to obtain

$$\frac{dx}{dt}\bigg)_{\beta=\text{constant}} = \frac{x_\alpha}{t_\alpha} = u + c = c_0 + \varepsilon\Big[(u_{00}+c_{00}) + (u_{01}+c_{01})\beta +$$
$$(u_{10}+c_{10})\alpha + (u_{02}+c_{02})\beta^2 + \ldots \Big]. \tag{2.75}$$

Thus for equal distances in β ($+\bar{\beta}$ and $-\bar{\beta}$) along the two branches of the envelope,

$$\frac{1}{2}\left[\left(\frac{dk}{dt}\right)_{+\bar{\beta}} + \left(\frac{dx}{dt}\right)_{-\bar{\beta}}\right] = \frac{1}{2}\left\{2c_0 + 2\varepsilon\left[(u_{00} + c_{00}) + \right.\right.$$

$$\left.\left.(\bar{\bar{\beta}} - \bar{\beta})(u_{01} + c_{01}) + 0(\bar{\beta}^2)\right]\right\}$$

$$= c_0 + \varepsilon(u_{00} + c_{00}) \simeq U. \tag{2.76}$$

The momentum equation (2.66b) holds through order $\varepsilon\sigma^2$ as one may show most easily by using the equivalent relation

$$\frac{p_1 - p_0}{\rho_1 - \rho_0} = \frac{\gamma(p_1 + p_0)}{\rho_1 + \rho_0} \quad,$$

and expressing p and ρ on the two sides of the shock in terms of an $(\alpha(\sigma), \beta(\sigma))$ expansion.

It is found then that if the shock wave is properly imposed on the region of triple mapping, the shock transition equations (2.66) may be used to account for the jumps in the physical quantities. The equations hold through order $\varepsilon\sigma^2$ where $\varepsilon\sigma$ is being used as a measure of shock strength since for example from equation (2.67)

$$\rho = \rho_0 + \varepsilon(\rho_{00} + \rho_{01}\beta + \rho_{10}\alpha + \ldots),$$

which along the shock becomes

$$\rho = \rho_0 + \varepsilon\left[\rho_{00} + \rho_{01}(\pm d_1\sigma) + 0(\sigma^2)\right]$$

shows that a jump in density is of the order of a jump in $\varepsilon\sigma$.

As far as the error due to neglect of entropy change is concerned, one would estimate it as the cube of the shock strength, or $(\varepsilon\sigma)^3$, but actually the error involved is larger

since the shock transition equations are satisfied only through order $\varepsilon\sigma^2$ and involve an error of order $\varepsilon\sigma^3$. To find the actual error incurred by pushing the solution a distance x beyond the point of shock formation, equations (2.57') and (2.74a,b) are used to show that since

$$x \sim \beta^2 \sim \sigma^2,$$

an error of order $\varepsilon\sigma^3$ corresponds to an

$$\text{error} \sim \varepsilon x^{3/2} \tag{2.77}$$

in traveling a distance x along the shock.

Illustrative example

The example used in the first section is reexamined here from the standpoint of shock development. The periodic initial distribution of the problem shows that not one, but an infinite set of shocks will develop in a repeating pattern from the infinite initial set of compression waves. Furthermore envelopes will occur for both the α - and β -sets of characteristics and a sketch of the pattern of envelopes is given on page 51. However, since this study does not purport to study interactions, a single developing shock wave will be isolated and used to illustrate the points made earlier in this section.

From equations (2.34), the envelope, $\frac{\partial x}{\partial \beta} = 0$, is found to be

$$\alpha - \beta = \frac{1}{\varepsilon A \sin\beta} + \frac{\cos\alpha + \frac{A+B}{A}\cos\beta}{\sin\beta} + \frac{\varepsilon R_1}{\sin\beta} + O(\varepsilon^2) \tag{2.78}$$

where

$$R_1 = (2\bar{A} + 4\bar{B})\cos\beta\cos\alpha - 3\bar{B}\sin\alpha\sin\beta - (\frac{\bar{A}}{2} + \frac{\bar{B}}{4})\cos2\alpha +$$

$$(- \frac{\bar{A}}{2} - \frac{13}{4}\bar{B})\cos2\beta + (\bar{A} + \frac{\bar{B}}{2}) + \frac{(2\bar{A}+\bar{B})^2}{2\bar{A}} \sin\beta(1 + \cos2\beta).$$

If the problem is made more definite by choosing

$$\gamma = 1.4$$

$$\bar{A} = 3/2$$

$$\bar{B} = 1$$

$$\varepsilon = 1/100$$

then the envelope becomes

$$\alpha = \beta + \frac{200}{3\sin\beta} + \frac{\cos\alpha + 5/3\cos\beta}{\sin\beta} + \frac{\varepsilon R_1}{\sin\beta} + O(\varepsilon^2) \qquad (2.79)$$

where

$$R_1 = 7\cos\beta\cos\alpha - 3\sin\alpha\sin\beta - \cos2\alpha - 4\cos2\beta + 2 + \frac{16}{3}\sin\beta(1+\cos2\beta).$$

The cusps of the envelope are located at $\frac{d\alpha}{d\beta} = 0$ and choosing the
the branch which has a cusp near $\beta = \pi/2$, the cusp is at

$$\alpha_c = 69.2$$

$$\beta_c = 1.58$$

$$x_c = 34.9$$

$$c_0 t_0 = 33.3$$

Then if the problem is shifted to put the cusp at
the origin in both the (α, β)- and (x, t)-planes, the following
expansions of the type (2.59) and (2.57') apply.

The equation of the envelope in the (α, β)-plane near
the cusp has the expansion,

$$\alpha = 31.9(\beta)^2 + \ldots . \tag{2.80}$$

The quantities x, $c_0 t$, u, and c near the cusp exhibit the following behavior.

$$x \simeq +.51\alpha - .008\alpha\beta + .08\beta^3 + \ldots$$

$$c_0 t \simeq +.52\alpha + .008\alpha\beta - .08\beta^3 + \ldots$$

$$\frac{u}{c_0} \simeq \frac{\epsilon}{\delta-1}\left[-1.008 - \beta + .06\alpha + .005\beta^2 + .499\alpha^2 + \ldots\right] \tag{2.81}$$

$$\frac{c}{c_0} \simeq 1 + \frac{\epsilon}{2}\left[0.988 - \beta - .06\alpha + .005\beta^2 - .499\alpha^2 + \ldots\right].$$

That is, the expressions (2.81) do assume the form predicted in (2.57'), and in fact relations of the type (2.62) are verified since in

$$x_{11}k = -3x_{03}$$

The values are

$$k = 31.9$$

$$x_{11} = -.008$$

$$x_{03} = +.08$$

and the equality holds to within the accuracy of the calculation.

The error involved in this particular problem may be estimated again from the failure of the shock transition equations to hold through order $\epsilon\sigma^3$. From the first of equations (2.81)

$$x \simeq 16\beta^2 + 0(\beta^3) \simeq 16\sigma^2 + 0(\sigma^3)$$

so that $\quad \epsilon\sigma^3 \simeq \epsilon\left(\frac{x}{16}\right)^{3/2} = \frac{\epsilon}{64}x^{3/2}, \tag{2.82}$

and the solution may be continued for a distance x along the
shock with an error given by (2.82).

As stated previously, the actual flow pattern in
the (x,t)-plane is a configuration of intersecting compression
and expansion waves, so that depending on the time of shock
development the compression wave traveling to the right and
steepening has encountered a certain number of leftward-
traveling compression and rarefaction waves. From the fact
that a shock developes at a time, t, of order $\frac{1}{\varepsilon}$ one sees
that the patterns of interaction vary with ε, and that in
fact for certain epsilons the shocks traveling in different
directions would tend to form at the same time, that is, the
envelopes,

$$\frac{\partial x}{\partial \beta} = 0 \quad : \quad \alpha = \beta + \frac{1}{\varepsilon \bar{A} \sin\beta} + \frac{\cos\alpha + \frac{\bar{A}+\bar{B}}{\bar{A}}\cos\beta}{\sin\beta} + \frac{\varepsilon R_1}{\sin\beta} + O(\varepsilon^2) \qquad (2.83)$$

$$\frac{\partial x}{\partial \alpha} = 0 \quad : \quad \beta = \alpha + \frac{1}{\varepsilon \bar{A} \sin\alpha} + \frac{\cos\beta + \frac{\bar{A}+\bar{B}}{\bar{A}}\cos\alpha}{\sin\alpha} + \frac{\varepsilon R_2}{\sin\alpha} + O(\varepsilon^2) \qquad (2.84)$$

where $R_1(\alpha,\beta) = R_2(\beta,\alpha)$

would each have a cusp at the same values of α and β . In
Fig. 2 on page 51 are shown sketches of the pattern in the
(x,t)-plane and of the effect of ε on the pattern of inter-
action. The initial distribution of c is superimposed on
the diagrams. For the problem discussed above with $\varepsilon = 1/100$,
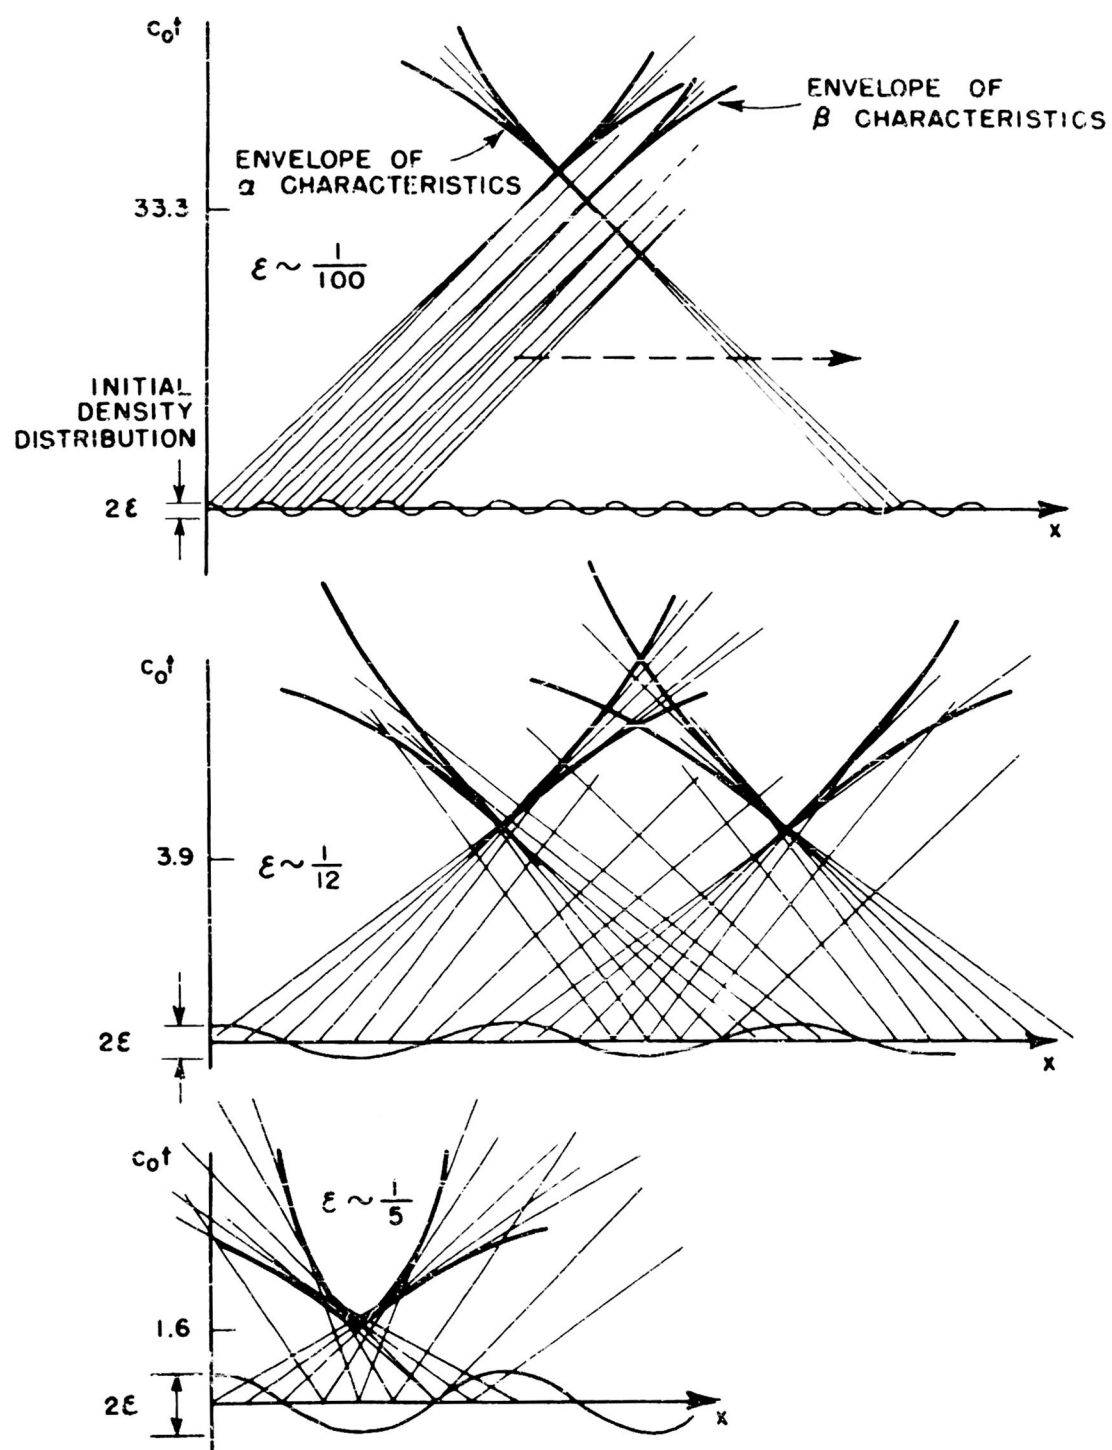the shock development is delayed so long that many interactions

FIG. 2 PATTERNS OF SHOCK FORMATION FOR DIFFERENT VALUES OF ε

have occurred; for $\varepsilon \sim \frac{1}{12}$ on the other hand only one interaction
has occurred, and for some $\varepsilon > 1/6$ the pattern of Fig. 2c occurs.
This last estimate cannot be made with assurance from the
equations, since the ε is larger than that allowed on page 28
from convergence considerations, but obviously there will be
a first ε to give such a region, and there will also be a
set of increasing ε's involving such regions. The behavior
of the solution in these neighborhoods has not been explored
in detail and might prove of considerable interest.

B. Cylindrical and Spherical Wave Propagation

Introduction

The success with which the coordinate-perturbation
type of solution was able to describe the region of shock forma-
tion for the case of the plane wave, leads one to hope that
this type of solution might be extended to describe shock
regions for the spherical and axi-symmetrical cases. However,
in the plane wave case the right to carry the solution up to
and through the shock depended on a definite proof of the con-
vergence of the series, and unfortunately such a convergence
proof has not yet been found for the higher dimension cases.
Thus the right to extend the solution for these cases must
be held in abeyance.

Nevertheless it seems probable if not yet justified
that the extension can be made, and in fact G. B. Whitham [23],[24]

by allowing a perturbation to the direction of one set of characteristics has had considerable success in studying the regions of shocks.

Some aspects of the matter will be considered here. In section 1 the general form assumed by the equations for the sequence of perturbation functions will be given together with a brief discussion of the type of convergence conjectured for the series solutions.

Section 2 compares the results of section 1 with those found by Whitham in [23].

Section 1: Perturbation solutions

In terms of characteristic variables α and β, the equations describing spherical or cylindrical wave motion become ($\S 23$, [4])

$$x_\alpha = (u + c)t_\alpha \qquad \left(\frac{\gamma-1}{2}\right)\left[u_\alpha + \frac{(n-1)uc}{x}t_\alpha\right] + c_\alpha = 0$$

$$(2.85)$$

$$x_\beta = (u - c)t_\beta \qquad \left(\frac{\gamma-1}{2}\right)\left[u_\beta - \frac{(n-1)uc}{x}t_\beta\right] - c_\beta = 0,$$

where n is the number of dimensions involved, and where x and t are the space and time coordinates respectively, and u and c the velocity and speed of sound.

For simplicity the initial conditions will be given for a gas initially at rest, and as before the initial line will be defined by setting both α and β equal to x.

Then on $\alpha = \beta$,
$$x = \alpha = \beta$$
$$t = 0$$
$$u = 0$$
$$c = c_0 + \epsilon \tilde{c}^{(1)}(x).$$

$$(2.86)$$

If a perturbation solution is sought in the form

$$x = x^{(0)} + \varepsilon x^{(1)} + \varepsilon^2 x^{(2)} + \ldots$$

$$t = t^{(0)} + \varepsilon t^{(1)} + \varepsilon^2 t^{(2)} + \ldots$$

$$u = u^{(0)} + \varepsilon u^{(1)} + \varepsilon^2 u^{(2)} + \ldots$$

$$c = c^{(0)} + \varepsilon c^{(1)} + \varepsilon^2 c^{(2)} + \ldots$$

(2.87)

from (2.85) and (2.86) the terms free from ε are found to be

$$x^{(0)} = \frac{\alpha + \beta}{2}$$

$$c_0 t^{(0)} = \frac{\alpha - \beta}{2}$$

$$u^{(0)} = 0$$

$$c^{(0)} = c_0.$$

(2.88)

Using (2.88) the equations for the first order perturbation functions $u^{(1)}$ and $c^{(1)}$ become

$$\frac{\gamma - 1}{2}\left[u^{(1)}_\alpha + \frac{(n-1)}{\alpha+\beta}u^{(1)}\right] + c^{(1)}_\alpha = 0$$

$$\frac{\gamma - 1}{2}\left[u^{(1)}_\beta + \frac{(n-1)}{\alpha+\beta}u^{(1)}\right] - c^{(1)}_\beta = 0,$$

(2.89)

or, eliminating $c^{(1)}$,

$$u^{(1)}_{\alpha\beta} + \frac{(n-1)\left[u^{(1)}_\alpha + u^{(1)}_\beta\right]}{\alpha+\beta} - \frac{(n-1)u^{(1)}}{(\alpha+\beta)^2} = 0.$$

(2.90)

At this stage, both to expedite the calculations, and to obtain a solution in a form comparable with Whitham's work on spherical blast, the problem will be specialized to the spherical case,

$$n = 3.$$

Then (2.90) becomes

$$u_{\alpha\beta}^{(1)} + \frac{\left[u_\alpha^{(1)} + u_\beta^{(1)}\right]}{\alpha+\beta} - \frac{2u^{(1)}}{(\alpha+\beta)^2} = 0 \qquad (2.91)$$

which may be shown to have the solution

$$u^{(1)} = \frac{\frac{df(\alpha)}{d\alpha} + \frac{dg(\beta)}{d\beta}}{\alpha+\beta} - \frac{2\left[f(\alpha) + g(\beta)\right]}{(\alpha+\beta)2} \ ,$$

where f and g are arbitrary functions determined from the initial conditions. Finally using the initial conditions and the equations, a complete set of solutions for the first order perturbations is,

$$u^{(1)} = \frac{1}{\alpha+\beta}\left[\frac{df(\alpha)}{d\alpha} - \frac{df(\beta)}{d\beta}\right] - \frac{2}{(\alpha+\beta)^2}\left[f(\alpha) - f(\beta)\right]$$

$$\qquad\qquad (2.92)$$

$$c^{(1)} = - \frac{(\gamma-1)}{2}\cdot\frac{1}{\alpha+\beta}\left[\frac{df(\beta)}{d\beta} + \frac{df(\alpha)}{d\alpha}\right]$$

$$\lambda^{(1)} = -\frac{(\delta-1)}{4c_0}\left\{\frac{f(\alpha)+f(\beta)}{\alpha+\beta} + \ln(\alpha+\beta)\left[\frac{df(\beta)}{d\beta}+\frac{df(\alpha)}{d\alpha}\right] + \int_\beta^\alpha\left[\frac{1}{(\mu+\beta)^2} + \frac{1}{(\mu+\alpha)^2}\right]f(\mu)d\mu -\right.$$
$$\left. -\frac{f(\beta)}{\lambda\beta} - \frac{f(\alpha)}{2\alpha} - \frac{df(\beta)}{d\beta}\ln\lambda\beta - \frac{df(\alpha)}{d\alpha}\ln2\alpha\right\}$$

$$t^{(1)} = \frac{(\gamma+1)}{8c_0^2}\left\{\left(\frac{12-\gamma}{\delta+1}\right)\frac{f(\alpha)-f(\beta)}{\alpha+\beta} + \ln(\alpha+\beta)\left[\frac{df(\beta)}{d\beta} - \frac{df(\alpha)}{d\alpha}\right] - \int_\beta^\infty\left[\frac{1}{(\mu+\beta)^2} - \frac{1}{(\mu+\alpha)^2}\right]f(\mu)d\mu -\right.$$
$$\left. -\frac{f(\beta)}{\lambda\beta} + \frac{f(\alpha)}{\lambda\alpha} - \frac{df(\beta)}{d\beta}\ln\lambda\beta + \frac{df(\alpha)}{d\alpha}\ln\lambda\alpha\right\}$$

where $\frac{df(y)}{dy} = \frac{-2y}{\gamma-1}\,\sigma^{(1)}(y)$, so that the equation for $c^{(1)}$

becomes $c^{(1)} = \left[\alpha c^{(1)}(\alpha) + \beta c^{(1)}(\beta)\right]/(\alpha+\beta).$

$$\qquad\qquad (2.93)$$

However, at the next step, when the higher order perturbation functions, $u^{(2)}$ etc., are to be found, the term

$\dfrac{(n-1)u c t_\alpha}{x}$ in (2.85) introduces non-homogeneous terms into the equations and makes the solutions of the equation much more difficult to obtain. It is exactly this difficulty in finding the expressions for the solutions which has deterred the proof of the convergence of the perturbation series.

At any rate the form of the equations for the higher order perturbations can be given for a general n^{th} order perturbation. In view of the fact that

$$\frac{1}{x} = \frac{1}{x^{(0)}}\left\{ 1 - \frac{\varepsilon x^{(1)}}{x^{(0)}} + \varepsilon^2\left(-\frac{x^{(2)}}{x^{(0)}} + \left(\frac{x^{(1)}}{x^{(0)}}\right)^2\right) + \cdots + \right.$$

$$\left. \varepsilon^j \sum_{\substack{m\mu+l\lambda+\cdots+z\varsigma=j\\ m,l,z,\cdots>0\\ m\neq l\neq\cdots\neq z}} \frac{(x^{(m)})^\mu (x^{(l)})^\lambda \cdots (x^{(z)})^\varsigma}{(-x^{(0)})^{\mu+\lambda+\cdots+\varsigma}} + \cdots \right\}$$

and with $x^{(0)} = \dfrac{\alpha+\beta}{2}$, the general equations (2.85) become,

$$\frac{\gamma-1}{2}\left[u_\alpha^{(n)} + \frac{2}{\alpha+\beta} u^{(n)}\right] + c_\alpha^{(n)} = -\frac{2(\gamma-1)}{\alpha+\beta} \sum_{\substack{p+q+r+j=n\\ p,q,r,j<n}} u^{(p)} c^{(q)} t_\alpha^{(r)} \quad \text{times}$$

$$\cdot \sum \frac{(x^{(m)})^\mu (x^{(l)})^\lambda \cdots (x^{(z)})^\varsigma}{\left(-\frac{\alpha+\beta}{2}\right)^{\mu+\lambda+\cdots+\varsigma}} \quad ,$$

$$\frac{\gamma-1}{2}\left[u_\beta^{(n)} + \frac{2}{\alpha+\beta} u^{(n)}\right] - c_\beta^{(n)} = +\frac{2(\gamma-1)}{\alpha+\beta} \sum_{\substack{p+q+r+j=n\\ p,q,r,j<n}} u^{(p)} c^{(q)} t_\beta^{(r)} \quad \text{times}$$

$$\cdot \sum \frac{(x^{(m)})^\mu (x^{(l)})^\lambda \cdots (x^{(z)})^\varsigma}{\left(-\frac{\alpha+\beta}{2}\right)^{\mu+\lambda+\cdots+\varsigma}} \quad , \tag{2.94}$$

$$x_\alpha^{(n)} - c_o t_\alpha^{(n)} = \sum_{j=1}^{n} \left[u^{(j)} + c^{(j)} \right] t_\alpha^{(n-j)}$$

$$x_\beta^{(n)} + c_o t_\beta^{(n)} = \sum_{j=1}^{n} \left[u^{(j)} - c^{(j)} \right] t_\beta^{(n-j)} \quad .$$

Now even though a proof of the convergence of the perturbation series has not been found, it seems worthwhile to discuss the region where a shock might be expected to develop, and to attempt an estimate of the size of the terms in the perturbation series in such a vicinity. To this end, as in the plane wave case, it will be assumed that only one set of characteristics folds into a triple mapping at one time. The region will be considered asymptotically in terms of only one characteristic variable.

First of all if the perturbation, $\tilde{c}^{(1)}$, to the quantity, c, is to vanish initially for large distances, (2.93) shows that asymptotically

$$\frac{df(y)}{dy} \sim constant. \qquad (2.95)$$

Then from the equation for $x^{(1)}$ in (2.92), under the assumption

$$\beta \gg \alpha \qquad (2.96)$$

one finds $x^{(1)} \sim \ln \beta$, $c_o t^{(1)} \sim \ln \beta$.

Considering therefore the asymptotic form for the expression

$$x = x^{(0)} + \varepsilon x^{(1)} + \cdots \sim 0(\beta) + 0(\varepsilon \ln \beta) + \ldots, \qquad (2.97)$$

We note that for the deviation from the linear case to be great enough to allow the characteristics to cross, the second term must be of order 1, or

$$\varepsilon \equiv O(\frac{1}{\ln \beta}) \tag{2.98}$$

(c.f. a similar conclusion by Whitham, §4[23]). The question then arises as to the order of the higher perturbation terms in this vicinity; that is, does the series converge in such a region? In answer only the unproved conjecture can be stated here that asymptotically

$$x^{(n)} \sim c_0 t^{(n)} \sim (\frac{\ln \beta}{\beta})^{n-1}$$
$$u^{(n)} \sim c^{(n)} \sim (\frac{\ln \beta}{\beta^n})^{n-1}, \quad n > 1. \tag{2.99}$$

The heuristic argument leading to the relations (2.99) is based on a consideration of the non-homogeneous terms in (2.94). For example the equation for the second order perturbation has terms of the form,

$$u_\beta^{(2)} + \ldots = \frac{4}{(\alpha+\beta)^2} x^{(1)} u^{(1)} + \ldots,$$

and if asymptotically

$$x^{(1)} \sim \ln \beta$$
$$u^{(1)} \sim \frac{1}{\beta},$$

then asymptotically $u_\beta^{(2)} + \ldots \sim \frac{\ln \beta}{\beta^3}$,

and then from this without being able to justify the step, we

assume

$$u^{(2)} \sim \frac{\ln \beta}{\beta^2}. \tag{2.100}$$

Relying on the conjectured relations (2.99), the perturbation series would have the asymptotic orders,

$$x \sim O(\beta) + O(\varepsilon \ln \beta) + O(\varepsilon^2 \frac{\ln \beta}{\beta}) + O(\varepsilon^3 \frac{\ln^2 \beta}{\beta^2}) + \ldots, \tag{2.101}$$

or in the vicinity $\ln \beta \sim \frac{1}{\varepsilon}$, indicative of possible shock development,

$$x \sim O(\beta) + O(1) + O(\frac{\varepsilon}{\beta}) + O(\frac{\varepsilon}{\beta^2}) + \ldots, \tag{2.102}$$

giving a series still convergent in a perturbation sense.

The work done by Whitham contains perturbation series whose behavior at large distances agrees with that found in this section, and is discussed in the following section.

Section 2:   Comparison with Whitham's work

Whitham, in his paper on "The Propagation of Spherical Blast," [23], makes the point that in a strictly linearized wave propagation problem the characteristics are straight and parallel, and hence cannot cross as they would in actuality do near regions of shock development. To correct the situation he proposes that the solutions for velocity and density be considered as functions not of the linearized characteristic, $c_o t - x$, but of a true characteristic variable, z, where z is determined to be truly constant along a characteristic. The linear characteristic is to be corrected by the expansion,

$$c_0 t = x - z\log x - h(z) - (m_1(z)\log x + m_2(z))x^{-1} + \dots,$$

equation (9), [23], and this expansion together with expansions of the type,

$$\text{velocity, } u = -c_0 f(z)x^{-1} + c_0 \left[(b_1(z)\log x + b_2(z))x^{-2} + \right.$$

$$\left. (c_1(z)\log x + c_2(z))x^{-3} + \dots \right],$$

are to be used to find the solution of the problem.

In other words, a perturbation to the direction of only one set of characteristics is used and it is assumed that there is no significant nonlinearity in the other set. Such an approach differs of course from that we have used earlier in this report where perturbation series were considered for both variables x and t in terms of both sets of characteristics. In our case a correction is automatically effected for both characteristic directions, but for the spherical case the problem tends to become more complex than for the plane wave propagation.

The solutions which Whitham finds using the expansions above are

$$u = \frac{(c_0 K)(z)}{x} + \frac{c_0}{x^2}\left[-\frac{1}{2}Kz^2\log x - B_1(\log x + \frac{1}{2}) - K\int_0^z \zeta h'(\zeta)d\zeta - B_2 - \frac{1}{2}Kz^2 - K_1 z^2 \right] + \dots ,$$

equation (12), [23]

$$c_0 t = x - z\log x - h(z) - \frac{(\frac{1}{2}Kz^2 + B_1)\log x + K_2 z^2 + \frac{1}{4}(\gamma + 5)B_1 + K\int_0^z \zeta h'(\zeta)d\zeta + B_2}{x} + \dots ,$$

equation (13), [23]

where B_1 and B_2 are arbitrary constants, $k = \frac{2}{\gamma+1}$, $k_1 = k^2 - \frac{1}{4}k$, $k_2 = \frac{5}{4} + \frac{3}{2}k$, and where the function $h(x)$ is determined from initial conditions.

On the other hand, the solutions for these functions which we find using our kind of perturbation approach are equations of the type (2.92), which, before enforcing initial conditions, become

$$u^{(1)} = \frac{\frac{df(\alpha)}{d\alpha} + \frac{dg(\beta)}{d\beta}}{\alpha + \beta} - 2\frac{[f(\alpha) + g(\beta)]}{(\alpha+\beta)^2} \tag{2.103}$$

$$x^{(1)} - c_0 t^{(1)} = \frac{\gamma+1}{4c_0} \frac{dg(\beta)}{d\beta} \log(\alpha+\beta) + \frac{1}{c_0(\alpha+\beta)}\left[g(\beta) + \frac{3-\gamma}{4} f(\alpha)\right] -$$

$$- \frac{(1+\gamma)}{4c_0} \int^{\alpha} \frac{f(\mu)\, d\mu}{(\mu+\beta)^2} + \tilde{x}_1(\beta) \tag{2.104}$$

where $\tilde{x}_1(\beta)$ is a function to be determined from the conditions of the problem.

Now in order to be able to compare Whitham's results with ours, several clarifications must be made. Primarily of course since his results are based on outgoing waves, our result must be simplified to contain functions of the characteristic β only. Further since we have results only through the first order, the comparison can be made only at this level. The equations to be compared become

$$u = \varepsilon\left[\frac{\frac{dg(\beta)}{d\beta}}{\alpha+\beta} - \frac{2g(\beta)}{(\alpha+\beta)^2}\right] + 0(\varepsilon^2) \tag{2.105}$$

$$x - c_0 t = \beta + \varepsilon\left[\frac{\gamma+1}{4c_0} \frac{dg(\beta)}{d\beta} \log(\alpha+\beta) + \frac{g(\beta)}{c_0(\alpha+\beta)} + \tilde{x}_1(\beta)\right] + 0(\varepsilon^2) \tag{2.106}$$

Whitham does not expressly state that his solution is a perturbation one, but the fact that he considers a deviation of the characteristics from those given by the linear solution implies a perturbation technique. Thus from his equation (13), the quantity z which is constant along a characteristic also must act as a small order perturbation quantity (see also the discussion in section 4 of his paper) and so we expand z in a perturbation series

$$z = \varepsilon z^{(1)}(\rho) + \varepsilon^2 z^{(2)}(\rho) + \dots . \qquad (2.107)$$

From the same sort of considerations his terms of order one in both $(c_o t - x)$ and u are set equal to zero. (Restriction of the problem to one of zero initial velocity does not alter the comparison.) From the terms of order one in his equations then

$$B_1 \log x + \frac{1}{4}(\delta + 5)B_1 + k \int_0^z \zeta h'(\zeta) d\zeta + B_2 = 0$$

$$B_1 \log x - \frac{B_1}{2} - k \int_0^z \zeta h'(\zeta) d\zeta - B_2 = 0, \qquad (2.108)$$

so that $B_1 = 0$ and B_2 must be such that

$$k \int_0^z \zeta h'(\zeta) d\zeta = -B_2 + \varepsilon \mathscr{L}^{(1)}(\rho) + \varepsilon^2 \mathscr{L}^{(2)}(\rho) + \dots \qquad (2.109)$$

In fact it is true that B_1 becomes zero in the problems Witham considers and that (2.109) or an analogue thereof appears in his section 3 in the form

$$k \int \zeta h'(\zeta) d\zeta = k \left[\frac{b^2}{2} - h_1(z) + zh(z) \right]$$

$$B_2 = -1/2kb^2$$

Using equations (2.107), (2.109), and also the expansions

$$x = \frac{\alpha+\beta}{2} + \varepsilon x^{(1)}(\alpha,\beta) + 0(\varepsilon^2)$$

$$h(z) = H^{(0)}(\beta) + \varepsilon H^{(1)}(\beta) + \varepsilon^2 H^2(\beta) + \ldots \qquad (2.110)$$

in his equations (12) and (13), gives:

$$u = \varepsilon \left[\frac{2c_0 k Z^{(1)}(\beta)}{\alpha+\beta} - \frac{4c_0 \ell^{(1)}(\beta)}{(\alpha+\beta)^2} + 0(\frac{1}{\alpha+\beta})^3 \right] + 0(\varepsilon^2), \qquad (2.111)$$

$$x - c_0 t = H^{(0)}(\beta) + \varepsilon H^{(1)}(\beta) + \varepsilon^2 H^{(2)}(\beta) + \left[\varepsilon \ell^{(1)}(\beta) + \varepsilon^2 \ell^{(2)}(\beta) + \ldots \right] \cdot \left[\frac{2}{\alpha+\beta} - \frac{\varepsilon 4 x^{(1)}}{(\alpha+\beta)^2} + \ldots \right] +$$

$$+ \varepsilon Z^{(1)}(\beta) \log \frac{\alpha+\beta}{2} + \varepsilon Z^{(1)}(\beta) \left[\frac{2\varepsilon x^{(1)}}{\alpha+\beta} + \ldots \right] + \varepsilon^2 Z^{(1)2} \left[\frac{1}{2} k \log \frac{\alpha+\beta}{2} - k_1 \right] \left[\frac{2}{\alpha+\beta} + 0(\varepsilon) \right]$$

$$(2.112)$$

Then upon comparing these results with ours, it is found that (2.111) agrees with (2.105) and (2.112) agrees with (2.106) provided

$$H^0(z) = \beta$$

$$H^{(1)}(\beta) = \tilde{x}_1(\beta) + \log 2$$

$$2c_0 \ell^{(1)}(\beta) = g(\beta) \qquad (2.113)$$

$$Z^{(1)}(\beta) = \frac{\gamma+1}{4c_0} \frac{dg(\beta)}{d\beta} .$$

This is a consistent set of relations since by differentiating (2.109) one finds

$$kzh'(z) = \varepsilon \frac{d\ell^{(1)}}{dz} + \ldots, \qquad (2.114)$$

and then using (2.110) and (2.113)

$$\frac{d\psi^{(1)}}{d\rho} = \frac{d\psi^{(1)}}{dz}\frac{dz}{d\rho} = \frac{d\psi^{(1)}}{dz}\frac{1}{h'(z)} ,$$

so that

$$kzh'(z) = k\varepsilon z^{(1)}(\rho)h'(z) = k\varepsilon\left[\frac{\gamma+1}{4c_0}\frac{dg(\rho)}{d\rho}\right]h'(z) = \frac{\varepsilon}{2c_0}\frac{dg(\rho)}{d\rho}h'(z)$$

and

$$\varepsilon\frac{d\psi^{(1)}(\rho)}{dz} = \varepsilon h'(z)\frac{d\psi^{(1)}}{d\rho} = \frac{\varepsilon h'(z)}{2c_0}\frac{dg(\rho)}{d\rho} = \frac{\varepsilon}{2c_0}\frac{dg(\rho)}{d\rho}h'(z),$$

and (2.114) holds under the conditions of (2.113).

Thus the first order solutions are in agreement, and although we do not have higher order solutions available for comparison, it is possible to show that Whitham's equations asymptotically take on the form (2.101) estimated in section 1. Asymptotically his equations (12) and (13) become

$$u \sim z0(\frac{1}{x}) + z^2 0(\frac{\log x}{x^2}) + \ldots$$
$$c_0 t - x \sim z0(\log x) + z^2 0(\frac{\log x}{x}) + \ldots$$

in good agreement with our estimates

$$u \sim \varepsilon 0(\frac{1}{\rho}) + \varepsilon^2 0(\frac{\log\rho}{\rho^2}) + \ldots$$
$$x \sim 0(\rho) + \varepsilon 0(\log\rho) + \varepsilon^2 0(\frac{\log\rho}{\rho}) + \ldots .$$

Evidently a good deal of work remains to be done in the application of coordinate perturbation to spherical (and cylindrical) wave propagation problems. Not only would general convergence

proofs be desirable for a process involving both sets of
characteristics, but even an investigation of the form
of the next order perturbation solutions would be useful.
Particular problems could be studied with special reference
to those involving the development of shock waves so that
the perturbation solution could be compared with the solu-
tion obtained by other means (e.g., numerical) both in the
ordinary regions of the flow and in the neighborhood of
the shock.

THE ELLIPTIC CASE

Introduction

The applicability of the coordinate perturbation type of solution to problems of an elliptic nature has been studied by investigating the problem of the flow past a thin airfoil. In the usual thin airfoil theory the solution obtained tends to break down near the leading edge of the airfoil and so in particular one would wish to correct the solution in this neighborhood. Lighthill considered the problem for the incompressible case [11] and found that the first order solution could be rendered uniformly valid by imparting a constant shift to the coordinate system. Furthermore he implied that for the higher order solutions any tendency for singularities to arise could be suppressed by finding suitable higher order perturbation functions for the coordinate system.

In this chapter, however, it is shown that the perturbation functions required to render the solution valid at each stage have increasing orders of singularity near the leading edge of the airfoil so that they do not represent a satisfactory coordinate transformation. Thus although a one-stage correction does effect an improvement in the uniform validity of the velocity fields for the incompressible case, the general applicability of the method at the next stages cannot be affirmed.

As far as the compressible case is concerned, even the one-stage correction proves unsatisfactory, and so in general it does not seem possible at this point to recommend the method of coordinate perturbation as a panacea for problems of an elliptic character.

<u>Section 1</u>: Incompressible case: Difficulties with Lighthill's solution.

In the following it will be shown that if a coordinate perturbation of the type

$$x = X + \varepsilon x^{(1)}(X,Y) + \varepsilon^2 x^{(2)}(X,Y) + \varepsilon^3 x^{(3)}(X,Y) + \dots$$
$$y = Y \tag{3.1}$$

is to be used to correct the perturbation solution to the problem of incompressible flow past a body whose leading edge at $x = 0$ behaves like

$$y = \varepsilon x^s \tag{3.2}$$

Then the process will be unsuccessful for $s < 1$. It will happen that near $x = 0$ the perturbation functions, $x^{(1)}$, have the behavior:

$$x^{(2)} \sim x^{2s-1}, \quad x^{(3)} \sim x^{(2)}, \quad x^{(4)} \sim x^{4s-3}, \quad x^{(5)} \sim x^{(4)}, \text{ etc.} \tag{3.3}$$

so that all the functions will be positive powers of x as $x \to 0$, only for

$$\lim_{n \to \infty} \quad s \geqslant \frac{n-1}{n} \text{ or } s \geqslant 1.$$

Lighthill [11] took the case $s = 1/2$ so that his $x^{(2)}$ is a constant, but his higher order perturbation functions become singular and the process breaks down.

In a general application of a coordinate transformation of the type (3.1), the perturbation functions for the y-coordinate would have to be restored, and the differential equations and boundary conditions on both sets of functions $x^{(1)}$ and $y^{(1)}$ determined. In this particular problem it may be shown that the equations can be satisfied by setting the pair $x^{(1)}$ and $y^{(1)}$ to be harmonic conjugate functions, but that it is also possible to set $y = Y$ as Lighthill does, provided that higher order perturbations in the velocities (potential) are retained. The matter of greater interest is the boundary condition, and in fact Lighthill determines the function $x^{(2)}$ solely on this basis.

In his equation (28), [11] he sets $u(x,y) \rightarrow u(X,y)$ and $v(x,y) \rightarrow v(X,y)$, where u and v are the velocity components in the x and y directions respectively, and then takes

$$\frac{v(X,y)}{u(X,y)} = F'(X + \epsilon^2 x^{(2)}) \quad \text{on the airfoil defined}$$

by
$$y = \epsilon F(X + \epsilon^2 x^{(2)}),$$

where for simplicity we have taken the camber equal to zero, and have further neglected the function $x^{(1)}$ agreeing with Lighthill that it is not necessary. The point of the step is to improve the usual perturbation solution $(u(x,y), v(x,y))$, which is not valid uniformly, by expressing the solution in terms of new coordinates in an X-y plane and then by determining the appropriate coordinate transformation between this plane and the physical plane which will send the approximate

solution into a uniformly valid one. Now in view of this mapping idea it seems simpler to express the problem in terms of a stream function since in the first place the image solution in the (x,y)-plane can be clearly visualized, and secondly, only one dependent perturbation solution is required. Using the stream function it is possible to duplicate the steps and motivation of Lighthill's paper and to show how difficulties occur at the next order perturbation which he did not consider.

For the stream function, ψ, where $u = \psi_y$, $v = -\psi_x$, the boundary conditions become

$$\frac{v}{u} = \frac{-\psi_x}{\psi_y} = \frac{dy}{dx} = \epsilon F'(x) \text{ on } \begin{cases} y = \epsilon F(x) \\ 0 \le x \le c \end{cases}$$

$$(x=0) = \text{leading edge}$$

$$(x=c) = \text{trailing edge}$$

or $\psi(x,y) = \text{constant} = 0.$ \hfill (3.4)

The analogue of Lighthill's equation (28) is then

$$\psi(X,y) = \text{constant} = 0 \quad \text{on} \quad y = \epsilon F(x) = \epsilon F(X + \epsilon^2 x^{(2)} + \ldots).$$
\hfill (3.5)

Now for

$$\psi = y + \epsilon \psi^{(1)}(X,y) + \epsilon^2 \psi^{(2)}(X,y) + \ldots$$

and for

$$\psi^{(1)}(X,y) = \psi^{(1)}(X,0) + y\frac{\partial \psi^{(1)}(X,0)}{\partial y} + \frac{y^2}{2}\frac{\partial^2 \psi^{(1)}}{\partial y^2} + \ldots, \quad y \text{ small,}$$

and for

$$y = \epsilon F(X + \epsilon^2 x^{(2)} + \ldots) = \epsilon F(X) + \epsilon^3 x^{(2)} F'(X) + \ldots,$$

one finds, as he did, a set of boundary equations of the

following types, derived from setting the coefficients of powers of ε equal to zero.

Boundary conditions

Terms order ε $\psi^{(1)}(X,0) = -F(X)$ $0 \leq X \leq C$

Terms order ε^2 $\psi^{(2)}(X,0) = -F(x)\dfrac{\partial \psi^{(1)}}{\partial y}\bigg]_{X,0}$

Terms order ε^3 $\psi^{(3)}(X,0) = -F\dfrac{\partial \psi^{(2)}}{\partial y} - x^{(2)}F' - \dfrac{F^2}{2}\dfrac{\partial^2 \psi^{(1)}}{\partial y^2}$ (3.6)

Terms order ε^4 $\psi^{(4)}(X,0) = -F\dfrac{\partial \psi^{(3)}}{\partial y} - x^{(3)}F' - x^{(2)}F'\dfrac{\partial \psi^{(1)}}{\partial y} -$

$$- \dfrac{F^2}{2}\dfrac{\partial^2 \psi^{(2)}}{\partial y^2} - \dfrac{F^3}{3!}\dfrac{\partial^3 \psi^{(1)}}{\partial y^3}$$

.
.
.
.
.

In these equations the arbitrary functions, $x^{(2)}$, $x^{(3)}$, etc. are to be chosen to suppress increasing orders of singularity (near $x = 0$) appearing in the successive $\psi^{(1)}$'s. It is necessary to estimate the order of the terms involved and we do this for a general case

$$F(X) = X^s(F_0 + F_1 X + \ldots), \quad s > 0.$$

From the terms of order

$$\psi^{(1)}(x,0) = -F(X) = -X^s(F_0 + F_1 X + \ldots),$$

so that the completed complex potential function,

$$G^{(1)} = \varphi^{(1)} + i\psi^{(1)},$$

which is to be used for finding $\dfrac{\partial \psi^{(1)}}{\partial y}$ in this neighborhood behaves like

$$G^{(1)} = -iF_0 Z^s + \ldots \qquad , Z = X + iy.$$

Then from

$$\frac{dG^{(1)}}{dZ} = \frac{\partial \psi^{(1)}}{\partial y} + i\frac{\partial \psi^{(1)}}{\partial X} = -iF_0 s Z^{s-1} + \ldots$$

one finds $\frac{\partial \psi^{(1)}}{\partial \psi}$ is regular in the neighborhood (as $y \to 0$, $X \to 0$). Similarly

$$\frac{d^2 G^{(1)}}{dZ^2} = \frac{\partial^2 \psi^{(1)}}{\partial X \partial y} + i\frac{\partial^2 \psi^{(1)}}{\partial X^2} = -iF_0 s(s-1) Z^{s-2} + O(Z^{s-1})$$

or

$$\lim_{y \to 0} \frac{\partial^2 \psi^{(1)}}{\partial y^2} = -\frac{\partial^2 \psi^{(1)}}{\partial X^2} \longrightarrow F_0 s(s-1) X^{s-2} + \ldots$$

and in turn

$$\lim_{y \to 0} \frac{\partial^3 \psi^{(1)}}{\partial y^3} = O(X^{s-2}).$$

Using these evaluations in equations (3.6) shows that whereas $\psi^{(2)}$ is finite as well as $\psi^{(1)}$ on the boundary (both $\sim X^s$), an increase in order of singularity appears in the ε^3 equation due to the term:

$$-\frac{F^2}{2}\frac{\partial^2 \psi^{(1)}}{\partial y^2} \sim -\frac{F_0^2 X^{2s}}{2} \cdot F_0 s(s-1) X^{s-2} = \frac{F_0^3 s(s-1) X^{3s-2}}{2}.$$

$x^{(2)}$ is to be chosen to cancel out this higher order singularity, or

$$-x^{(2)}_{F'} - \frac{F^2}{2}\frac{\partial^2 \psi^{(1)}}{\partial y^2} = 0$$

$$x^{(2)} = -\frac{F_0^2(s-1)}{2} X^{2s-1}.$$

Then from the terms of the ε^4 equation (3.6), since $\dfrac{\partial^3 \psi^{(1)}}{\partial y^3}$ is not more singular than $\dfrac{\partial^2 \psi^{(2)}}{\partial y^2} \sim \dfrac{\partial^2 \psi^{(1)}}{\partial y^2}$, the most singular terms involve

$$-x^{(3)} F' : \; -\frac{F^2}{2} \frac{\partial^2 \psi^{(2)}}{\partial y^2} = 0$$

giving $\quad x^{(3)} = 0(X^{2s-1}),\quad$ which is not more singular than $x^{(2)}$.

However, the equation of terms of order ε^5 will contain a term

$$\frac{F^4}{4!} \frac{\partial^4 \psi^{(1)}}{\partial y^4} = 0(X^{5s-4})$$

to be balanced by a term, $-x^{(4)} F'$ so that

$$x^{(4)} = 0(X^{4s-3}).$$

In summary then for

$$x = X + \varepsilon^2 x^{(2)}(X,y) + \varepsilon^3 x^{(3)}(X,y) + \ldots$$

as $y \to 0$

$x = 0^+$

	for $s = 1/2$
$x^{(2)} = -\dfrac{F_0^{\,2}(s-1)}{2} X^{2s-1} + \ldots$	$x^{(2)} = \dfrac{F_0^{\,2}}{4}$
$x^{(3)} = 0(X^{2s-1})$	$x^{(3)} = 0(1)$
$x^{(4)} = 0(X^{4s-3})$	$x^{(4)} = 0(\tfrac{1}{X})$
$x^{(5)} = 0(X^{4s-3})$	$x^{(5)} = 0(\tfrac{1}{X})$
$x^{(6)} = 0(X^{6s-5})$	$x^{(6)} = 0(\tfrac{1}{X^2})$

(3.7)

Thus Lighthill's determination that for $s = 1/2$, $x^{(2)} = \frac{F_0^2}{4}$, is quite correct and the correction serves to reduce the error in velocity at the leading edge from $O(1)$ to $O(\varepsilon)$.* However unfortunately the usual perturbation scheme is such that each higher order perturbation function, $\psi^{(i)}$, introduces a higher order singularity in this region (c.f. equations (3.6)), and the coordinate perturbation functions, $x^{(i)}$, cannot suppress the singularity without carrying it themselves. The result is that near the leading edge the perturbation series,

$$x = X + \varepsilon^2 x^{(2)}(X,0) + \varepsilon^3 x^{(3)}(X,0) + \varepsilon^4 x^{(4)} + \varepsilon^5 x^{(5)} + \varepsilon^6 x^{(6)} + \ldots$$

evaluated say for $X = O(\varepsilon^2)$, (which holds at the image in the (X,y)-plane of the leading edge), becomes (for $s = 1/2$),

$$x = O(\varepsilon^2) + O(\varepsilon^2) + O(\varepsilon^3) + O(\varepsilon^2) + O(\varepsilon^3) + O(\varepsilon^2) + \ldots$$

and the perturbation is no longer valid.

Also for $s \neq 1/2$ from (3.7), the perturbation functions will be positive powers of X only for $s \geqslant 1$, that is for profiles with a finite (or zero) slope at the origin, and so a convergent scheme can be evolved only for special simple cases where the leading edge is not blunt. Thus at this stage of the investigation no way seems available for extending the method to a generally useful scheme.

---

* The improvement in the solution for velocity is demonstrated in the supplement to this section.

A few further points involved in the failure of the
method are discussed in the next section with particular refer-
ence to the problem of the incompressible flow past an elliptic
cylinder.

<u>Supplement to section 1</u>: Improvement of the solution due
to coordinate shift

In the following is shown the improvement in the
solution for the velocity near the leading edge (at $x = 0$)
effected by a constant shift in the coordinate system. The
airfoil is assumed to have the profile

$$y = \varepsilon F(x) = \varepsilon \left[F_0 \sqrt{x} + F_1 x^{3/2} + \dots \right], \quad 0 \leqslant x \leqslant c. \qquad (3.8)$$

If a usual perturbation solution is found for the
problem and is expressed in terms of new variables X and Y,
the streamline $\psi = 0$ becomes,

$$\psi = Y + \frac{\varepsilon}{\pi} \, \mathcal{Im} \int_0^c \frac{F(w)\,dw}{Z-w} = 0, \qquad (3.9)$$

or, for the profile itself

$$1 = \frac{\varepsilon}{\pi} \int_0^c \frac{F(w)\,dw}{(X-w)^2 + Y^2} . \qquad (3.10)$$

Now since the profile given by (3.10) differs from that given
by (3.8), an error in velocity will appear so that at corres-
ponding points, z_A on the actual profile (3.8) and Z_B on the
solution (3.10) there will be velocity discrepancy of size

$$(z_A - z_B) \frac{\partial}{\partial Z} \text{ (velocity)} \qquad (3.11)$$

In (3.11) so long as the rate of change of velocity

is of order one, a difference in profiles of order ε^2 will introduce a velocity error of order ε^2 only. However near the leading edge as was shown earlier in the section,

$$O(\frac{\partial}{\partial z}(\text{velocity})) = O(\frac{\partial^2 \psi}{\partial z^2}) = O(\varepsilon \frac{\partial^2 \psi^{(1)}}{\partial z^2}) = O(\varepsilon \frac{1}{z^{s-2}}),$$

so that for a boundary difference of order ε^2 (with $s = 1/2$),

$$O(\frac{\partial}{\partial z}(\text{velocity})) = O(\varepsilon \frac{1}{(\varepsilon^2)^{3/2}}) = O(\frac{1}{\varepsilon^2}),$$

and from (3.11) the boundaries must agree through order ε^2 to give accuracy even up to order ε in velocity.

Thus it is to be shown that a coordinate correction of the type,

$$x = X + \varepsilon^2 x^{(2)} + \ldots = X + \varepsilon^2 \frac{F_0^2}{4} + \cdots$$
$$y = Y \qquad\qquad = Y \qquad\qquad\qquad (3.12)$$

will bring the actual profile and the solution profile into agreement at least through order ε^2 in the neighborhood of the leading edge. Away from this region, since the velocity derivative becomes of order one, a constant shift of order ε^2 will give only an ε^2-order error in velocity.

Near the leading edge on the actual airfoil let there be a parameter k such that

$$\bar{x} = k^2 \varepsilon^2$$

and then $\qquad y = \varepsilon F_0 \sqrt{\bar{x}} = \varepsilon^2 F_0 k.$ $\qquad\qquad (3.13)$

Then the same coordinates are to hold through order ε^2 for corresponding points on the streamline of (3.10). In the integral of this equation, letting $Y = y = F_0 k \varepsilon^2$ and $w = t^2$, one finds

$$\int_0^{\sqrt{c}} \frac{t^2 dt}{t^4 - 2t^2 X + X^2 + F_0^2 k^2 \varepsilon^2} = \int_0^{\sqrt{c}} \frac{t^2 dt}{t^4 + bt^2 + c^2} = \int_0^{\sqrt{c}} \frac{B dt}{t^2 + t_1^2} + \int_0^{\sqrt{c}} \frac{D dt}{t^2 + t_1^2} \qquad (3.14)$$

where

$$b = -2X \qquad\qquad B = \frac{(b + \sqrt{b^2 - 4c})^2}{(b + \sqrt{b^2 - 4c})^2 - 4c}$$

$$c = X^2 + F_0^2 k^2 \varepsilon^2 \qquad\qquad D = \frac{-4c}{(b + \sqrt{b^2 - 4c})^2 - 4c}$$

$$t_1^2 = \frac{b + \sqrt{b^2 - 4c}}{2}$$

$$t_2^2 = \frac{b - \sqrt{b^2 - 4c}}{2}$$

Then since

$$\int_0^{\sqrt{c}} \frac{B dt}{t^2 + t_1^2} = \frac{B}{t_1} \tan^{-1} \frac{\sqrt{c}}{t_1} \quad,$$

and since t_1, t_2 are order $\sqrt{X}$ which is order $\sqrt{\varepsilon^2}$ in the region under consideration,

$$\int_0^{\sqrt{c}} \frac{B dt}{t^2 + t_1^2} = \frac{B}{t_1} \left[\frac{\pi}{2} - \frac{t_1}{\sqrt{c}} - \cdots \right] = \frac{B}{t_1} \left[\frac{\pi}{2} + O(\varepsilon) \right] \quad,$$

and thus

$$\frac{2\varepsilon F_0}{\pi} \int_0^{\sqrt{c}} \frac{t^2 dt}{t^4 - 2k^2 x + x^2 + F^2 k^2 \varepsilon^2} = \varepsilon F_0 \left[\frac{B}{t_1} + \frac{D}{t_2} + O(1) \right] . \quad (3.15)$$

From (3.12), in the region defined by (3.13)

$$X = x - \frac{\varepsilon^2 F_0^2}{4} = \varepsilon^2 (k^2 - \frac{F_0^2}{4}), \quad (3.16)$$

and this value for X together with $y = Y = \varepsilon^2 F_0 k$ must yield a point on the streamline (3.10) at least through order ε^2 accuracy. From (3.15) since t_1, $t_2 = O\sqrt{x}$, an error of ε^2 in (3.16) would cause an error of order one in (3.10), and so it need only be shown that (3.16) as given allows (3.10) to hold through order one. By straight substitution one obtains

$$\varepsilon F_0 \left[\frac{B}{t_1} + \frac{D}{t_2} + \ldots \right] = \frac{1}{8ik} \left[4(\frac{F_0}{2} + ik) - 4(\frac{F_0}{2} - ik) \right] = \frac{8ik}{8ik} = 1$$

as required.

In other words near the leading edge the boundaries differ by $O(\varepsilon^3)$ only; away from this region this discrepancy is at most $O(\varepsilon^2)$, and the velocity error has been smoothed to be at most $O(\varepsilon)$ in the entire vicinity.

Section 2: Incompressible flow past an elliptic cylinder

In the previous section we saw that each new perturbation function $\psi^{(i)}$, introduced an increase in order of singularity near the leading edge. One is led to inquire then if it would not be possible to use only the terms

$$\psi = \psi^{(0)} + \varepsilon \psi^{(1)},$$

and to throw the solution correction entirely into a perturbation in both x and y coordinates. In fact it may be shown that the perturbation functions $y^{(1)}(X,Y)$ always appear in the equations associated with the respective $\psi^{(1)}$ functions, so that either set of functions may be used alone. Unfortunately this reciprocity also implies that the process will fail in these new terms, as indeed it does, but some facts of interest arise from the investigation.

The elliptic cylinder has been studied in order that intermediate approximate solutions could be compared with the exact solution. For the ellipse,

$$x^2 + \frac{y^2}{\varepsilon^2} = 1, \qquad \varepsilon \ll 1, \tag{3.17}$$

the exact solution for the complex potential, F, is

$$F = \frac{U}{1 - \varepsilon} \left[z - \varepsilon \sqrt{z^2 - 1 + \varepsilon^2} \right], \tag{3.18}$$

where $z = x + iy$

$$F = \varphi + i\psi \begin{cases} \varphi = \text{potential function} \\ \psi = \text{stream function} \end{cases}$$

$U =$ uniform flow at infinity.

Then, attempting a perturbation solution,

$$\tilde{F} = \tilde{F}^{(0)} + \varepsilon \tilde{F}^{(1)}(X,Y),$$

an approximate solution may be found for the complex potential

$$\tilde{F} = AU \left[z + \varepsilon(z - \sqrt{z^2 - 1}) \right] \tag{3.19}$$

where A is a constant depending on any scale changes enter-
ing, and where Z has been used in the sense that the capital
letter coordinates were used in section 1.

The streamline arising from (3.19) as representing
the airfoil is

$$x^2 + \frac{Y^2(1+\epsilon)^2}{2} = \frac{(1+\epsilon)^2}{1+2\epsilon} . \tag{3.20}$$

Thus when the (x,y)-plane and the (X,Y)-plane are
superimposed, a discrepancy shows up between the airfoil
streamline in the two planes.

The question to be investigated is whether a coor-
dinate perturbation of the form

$$z = Z + \epsilon z^{(1)}(Z) + \epsilon^2 z^{(2)}(Z) + \ldots \tag{3.21}$$

can be used to resolve the difference between the two stream-
lines and thus make (3.19) a solution of the problem. For
the ellipses of (3.17) and (3.20) the mapping is given by

$$z = \frac{1}{\sqrt{1+2\epsilon}}\left[Z(1+\epsilon-\epsilon^2) + \epsilon^2\sqrt{z^2-1} \right], \tag{3.22}$$

and since this can be expressed in the form of equation (3.21)

$$z = Z + \epsilon^2\left(-\frac{Z}{2} + \sqrt{(z^2-1)}\right) - \epsilon^3\sqrt{z^2-1} + \epsilon^4\left(\frac{3}{8}Z + \frac{3}{2}\sqrt{z^2-1}\right) + \ldots$$

$$\tag{3.23}$$

one is led to hope that the perturbation idea will work for
the problem.

In order to find the solution (3.23) in the general case one would take the perturbations,

$$x = X + \varepsilon x^{(1)}(X,Y) + \varepsilon^2 x^{(2)}(X,Y) + \ldots$$

$$y = Y + \varepsilon y^{(1)}(X,Y) + \varepsilon^2 y^{(2)}(X,Y) + \ldots \tag{3.24}$$

and find from the equations that $x^{(1)}$ and $y^{(1)}$ are harmonic conjugate functions whose boundary conditions are to be set by a perturbation mapping of (3.17) into (3.20). As far as the first order perturbation functions, $x^{(1)}$ and $y^{(1)}$, are concerned, it may easily be shown correct to take

$$x^{(1)} = y^{(1)} \equiv 0.$$

The equation for the agreement of boundaries then becomes,

$$4\left[\varepsilon^2 y^{(2)2} + 2\varepsilon^3 y^{(2)} y^{(3)} + \ldots\right]\left[(1-X^2) - 2\varepsilon(1-X^2) + \right.$$
$$\left. \varepsilon^2(1 + 3(1-X^2)) + \ldots\right] =$$
$$\left\{2\varepsilon(1-X^2) - \varepsilon^2\left[1 + 3(1-X^2 + 2Xx^{(2)} + y^{(2)2}\right] + \ldots\right\}^2, \tag{3.25}$$

and of course another condition must be specified to determine both $y^{(2)}$ and $x^{(2)}$. For the case $(1-X^2) \not< 0(\varepsilon^2)$ one obtains

$$y^{(2)} = \sqrt{1-X^2}, \tag{3.26}$$

but for the case $(1-X^2) = 0(\varepsilon^2)$ by expanding both $x^{(2)}$ and $y^{(2)}$ as power series around an extremum of the streamline ellipse (3.20) one obtains, in terms of the local variables

$$\xi = \frac{X - \left(\frac{1+\epsilon}{\sqrt{1+2\epsilon}}\right)}{\epsilon^2}$$

$$\eta = \frac{Y}{\epsilon^2}$$

the series for harmonic conjugate functions in the form

$$x^{(2)} = a_{00} + a_{10}\xi + a_{20}\xi^2 - a_{20}\eta^2 + a_{30}\xi^3 + \cdots \tag{3.27}$$

$$y^{(2)} = a_{10}\eta + 2a_{20}\xi\eta + a_{20}3\eta\xi^2 - a_{30}\eta^3 + \cdots \ .$$

Then by imposing regularity on $x^{(2)}$ and $y^{(2)}$ at infinity (in the $\frac{Y}{\epsilon^2}$ scale) one finds of course that only a constant fulfills the requirements, so that exactly as in section 1, the required coordinate change is

$$x^{(2)} = -\frac{1}{2}$$
$$y^{(2)} = 0. \tag{3.28}$$

However, the disagreement of this local condition (3.28) with the condition (3.26) shows that a general boundary condition has not been found, and of course the functions $x^{(2)}$ and $y^{(2)}$ are not determined until their values along the entire boundary are given. That such a general boundary condition cannot be found by the perturbation method we are using is unfortunately true as can be shown in the following way.

The correct perturbation function of second order is given by the known solution of (3.23) as

$$x^{(2)} + iy^{(2)} = z^{(2)} = -\frac{z}{2} + \sqrt{z^2 - 1} \ . \tag{3.29}$$

When this is evaluated on the boundary given by (3.20) one finds for example

$$\left(y^{(2)} \right)^2 = \left(\frac{1 + \frac{\varepsilon}{2}}{1 + \varepsilon} \right)^2 \left(1 - x^2 + \frac{\varepsilon^2}{1 + 2\varepsilon} \right), \qquad (3.30)$$

and so it is shown that the unique correct function $y^{(2)}$ which is specified uniquely by the boundary condition (3.30) must have that boundary condition a function of ε. Any perturbation method which requires the conditions to be free from ε cannot give a correct result.

In summary, then, the attempt to improve an approximate solution near the leading edge of the airfoil fails beyond the first step since the boundary conditions on the perturbation functions must involve ε which contradicts the perturbation method itself. Although it is true that the one-step correction involving a constant shift can reduce the large error in the velocity at the leading edge, no clear cut method for extending the process seems to present itself.

One further attempt at coordinate perturbation was attempted and will be described briefly. It seemed possible that the difficulty with the boundary conditions near the leading edge was due to the "sharpness" or rapid change of slope in this region, and could be avoided by mapping the streamline of the approximate solution into a more nearly circular form. The process was carried out, but proved unsuccessful from the perturbation point of view.

The steps followed were first the determination of the mapping of the approximate streamline (3.20) into a circle in the w plane. In this step the mapping

$$Z = \frac{1}{2}(w + \frac{1}{w}) \tag{3.31}$$

takes (3.20) into a circle

$$|w| = \sqrt{1 + 2\varepsilon} = 1 + \varepsilon - \frac{\varepsilon^2}{2} + \dots \quad .$$

Then the image of the actual airfoil (3.17) under this mapping (3.31) was found. For $w = \rho e^{i\Theta}$ (3.17) becomes

$$\rho^2 = \frac{\sqrt{\varepsilon^2 + \sin^2\Theta} + \varepsilon \sin\Theta}{\sqrt{\varepsilon^2 + \sin^2\Theta} - \varepsilon \sin\Theta} \quad . \tag{3.32}$$

The question then is raised as to whether ρ may be expressed as a perturbation series

$$\rho = 1 + \varepsilon\, g(\Theta) + \dots \tag{3.33}$$

where $g(\Theta)$ and its derivatives are of order one near the region in question ($\Theta \sim 0$).

However

$$2\rho\rho_\Theta = \frac{2\varepsilon^3 \cos\Theta}{\sqrt{\varepsilon^2 + \sin^2\Theta}\ \left(\sqrt{\varepsilon^2 + \sin^2\Theta} - \varepsilon\sin\Theta\right)^2} \tag{3.34}$$

and near $\Theta = 0$, $\rho = O(1)$ so

$$2\rho\rho_\Theta = O(1)$$
$$\rho_\Theta = O(1),$$

and

$$\frac{dg}{d\Theta} = \frac{1}{\varepsilon}\frac{d}{d\Theta}(\rho - 1) = \frac{1}{\varepsilon}O(1) = O(\frac{1}{\varepsilon}). \tag{3.35}$$

Thus the derivatives of g change order and an expansion of the type (3.33) is not possible even in these terms. Actually g is a function of ε in this region, and in fact if one sets

$$\frac{\sin\theta}{\varepsilon} = c \qquad (3.36)$$

then (3.32) may be expressed as

$$\rho^2 = 1 + 2\frac{c\varepsilon}{\sqrt{1+c^2}} + 2\left(\frac{c\varepsilon}{\sqrt{1+c^2}}\right)^2 + 2\left(\frac{c\varepsilon}{\sqrt{1+c^2}}\right)^3 + \dots \qquad (3.37)$$

where the function $\frac{c\varepsilon}{\sqrt{1+c^2}}$ remains $O(\varepsilon)$ for the full range $0 \le c \le \frac{1}{\varepsilon}$.

It seems clear that the method of coordinate perturbation as it has been used in this study is not satisfactory as it stands for improving solutions to elliptic problems. Clearly if one takes a coordinate perturbation of the form

$$z = Z + \varepsilon g^{(1)}(Z) + \varepsilon^2 g^{(2)}(Z) + \dots \qquad (3.38)$$

under the requirements that

(i) $\frac{dz}{dZ} = 1$ or constant as $Z \rightarrow \infty$

(ii) $g^{(1)}(Z)$ be regular outside the body

(iii) $g^{(1)}(Z)$ be of order 1 in some small region (say of order ε^2) near the body ($Z = O(\varepsilon^2)$),

then

$$g^{(1)}(Z) = Z\left(c_0 + \frac{c_1}{Z} + \frac{c_2}{Z^2} + \dots\right) \rightarrow Z\left(c_0 + \frac{b_1\varepsilon^2}{Z} + \frac{c_2\varepsilon^4}{Z^2} + \dots\right)$$

or $\frac{g^{(1)}(Z)}{Z}$ = function of $\frac{Z}{\varepsilon^2}$ which contradicts an expansion of the perturbation type (3.38).

Unfortunately the study of the incompressible case, which was undertaken in the hope that some method of solution improvement might be found which could carry over to the compressible case, has not yielded any such method. The incompressible case retains its former status as a straight mapping problem, and it will be found that even the constant coordinate shift which served as a one-stage velocity correction in this work cannot be applied satisfactorily to the compressible case.

Section 3: The compressible case

In the hope of finding at least a one-stage correction to the velocity given by the usual perturbation solution to the compressible flow past a thin airfoil, the problem was investigated again for the case of an elliptic cylinder. For compressible flow however the equations for the different order coordinate perturbation functions are no longer simple Laplace equations, but involve nonhomogeneous terms based on lower order functions. Further, these terms contribute increasing orders of singularity near the leading edge of the airfoil. Thus where in the incompressible case the coordinate perturbation functions were chosen to suppress singularities arising from the boundary conditions, in the compressible case the choice is governed by suppression of singularities in the equations. In this case it will be found just as before that the increase in order of singularity

of the perturbation functions themselves prevents the perturbation series from converging near the leading edge, but even worse in this case not even a first stage constant shift is permissible since it does not satisfy the equations involved.

That this is so may be seen by a study of the equations of the problem. The equation for the streamfunction, ψ, for compressible flow is

$$\psi_{xx}\left(\frac{c^2}{c^2} - M^2 u^2\right) - 2M^2 uv\, \psi_{xy} + \psi_{yy}\left(\frac{c^2}{c^2} - M^2 v^2\right) = 0\,, \qquad (3.39)$$

where $\quad \rho u = \psi_y$

$\qquad\quad -\rho v = \psi_x$

$\qquad\quad M =$ Mach number

$\qquad\quad c_0 =$ speed of sound at infinity

$\qquad\quad \rho =$ density.

The problem studied here has been simplified to the extent of using the special case

$$\text{pressure, } P = \alpha - \frac{\beta^2 c_0^2}{\rho}\,, \qquad \alpha, \beta^2 = \text{constants,} \qquad (3.40)$$

so that (3.39) becomes

$$\psi_{xx}\left(1 - \frac{M^2}{\beta^2}\psi_y^2\right) + \frac{2M^2}{\beta^2}\psi_x\psi_y\psi_{xy} + \psi_{yy}\left(1 - \frac{M^2}{\beta^2}\psi_x^2\right) = 0. \qquad (3.41)$$

Then solving the problem on the ellipse (3.17)

$$x^2 + \frac{y^2}{\varepsilon^2} = 1$$

by the usual perturbation method, and then expressing the solution in terms of new variables, X and Y, exactly as was done for the incompressible case, one finds that a solution

$$\Psi = Y + \varepsilon \, \psi^{(1)}(X,Y) \tag{3.42}$$

gives the following streamline as an approximation to the ellipse,

$$X^2 + \frac{Y^2}{\varepsilon^2}(1 + \varepsilon k)^2 = 1 + \frac{\varepsilon^2 k^2}{1 + 2\varepsilon k} \tag{3.43}$$

where $\quad k^2 = 1 - \dfrac{M^2}{\beta^2}$.

To correct the solution a coordinate perturbation of the type

$$x = X + \varepsilon x^{(1)} + \varepsilon^2 x^{(2)} + \ldots$$
$$y = Y + \varepsilon^2 y^{(2)} + \ldots \tag{3.44}$$

is attempted. (Only one of the functions, $\psi^{(i)}$ or $y^{(1)}$ need be used because they are redundant. We have taken $\psi^{(i)} \equiv 0$, $i > 1$.)

Substitution of (3.44) into (3.41) yields a set of equations based on equating to zero the coefficients of each power of ε. The equations are

Terms of order ε

$$\left(1 - \frac{M^2}{\beta^2}\right)\psi^{(1)}_{XX} + \psi^{(1)}_{YY} = 0 \quad \begin{array}{l}\text{which is satisfied by the} \\ \text{usual first order pertur-} \\ \text{bation function}\end{array} \tag{3.45}$$

Terms of order ε^2

$$\left(1 - \frac{M^2}{\beta^2}\right)y^{(2)}_{XX} + y^{(2)}_{YY} = -\psi^{(1)}_{X}\left[\left(1 - \frac{M^2}{\beta^2}\right)x^{(1)}_{XX} + x^{(1)}_{YY}\right] -$$
$$2\left[\left(1 - \frac{M^2}{\beta^2}\right)x^{(1)}_{X}\psi^{(1)}_{XX} + x^{(1)}_{Y}\psi^{(1)}_{XY}\right] +$$
$$\frac{2M^2}{\beta^2}\left[\psi^{(1)}_{X}\psi^{(1)}_{XY} - \psi^{(1)}_{Y}\psi^{(1)}_{XX}\right] . \tag{3.46}$$

Terms of order ε^3

$$(1-\tfrac{M^2}{\beta^2})y^{(3)}_{XX} + y^{(3)}_{YY} = -\psi^{(1)}_X\left[(1-\tfrac{M^2}{\beta^2})x^{(2)}_{XX} + x^{(2)}_{YY}\right] - 2x^{(2)}_Y\psi^{(1)}_{XY} +$$

$$+ x^{(2)}_X\left[3(1-\tfrac{M^2}{\beta^2})\psi^{(1)}_{XX} + 5\psi^{(1)}_{YY}\right] + y^{(2)}_{XY}\left[-2\tfrac{M^2}{\beta^2}\psi^{(1)}_X + 2x^{(1)}_Y\right] +$$

$$+ y^{(2)}_{XX}\left[-3(1-\tfrac{M^2}{\beta^2})x^{(1)}_X + 3\tfrac{M^2}{\beta^2}\psi^{(1)}_Y - \psi^{(1)}_Y\right] + y^{(2)}_{YY}\left[-5x^{(1)}_X - \psi^{(1)}_Y\right] +$$

$$+ \psi^{(1)}_{XX}\left\{2y^{(2)}_Y - 7(1-\tfrac{M^2}{\beta^2})(x^{(1)}_X)^2 + (x^{(1)}_Y)^2 - 6\tfrac{M^2}{\beta^2}\psi^{(1)}_Y x^{(1)}_X + \right.$$

$$\left. + \tfrac{M^2}{\beta^2}\left[(1-\tfrac{M^2}{\beta^2})(\psi^{(1)}_X)^2 - (\psi^{(1)}_Y)^2\right]\right\} +$$

$$+ \psi^{(1)}_{XY}\left[-2y^{(2)}_X + 2\tfrac{M^2}{\beta^2}\psi^{(1)}_X\psi^{(1)}_Y + 6\tfrac{M^2}{\beta^2}\psi^{(1)}_X x^{(1)}_X - 8x^{(1)}_X x^{(1)}_Y\right] +$$

$$+ x^{(1)}_{XX}\left[-2(1-\tfrac{M^2}{\beta^2})x^{(1)}_X\psi^{(1)}_X + 2\tfrac{M^2}{\beta^2}\psi^{(1)}_Y\psi^{(1)}_X + (1-\tfrac{M^2}{\beta^2})y^{(2)}_X\right] +$$

$$+ x^{(1)}_{YY}\left[-4x^{(1)}_X\psi^{(1)}_X + y^{(2)}_X\right] + x^{(1)}_{XY}\left[-2\tfrac{M^2}{\beta^2}(\psi^{(1)}_X)^2 + 2x^{(1)}_Y\psi^{(1)}_X\right].$$

$$(3.47)$$

Equations (3.45), (3.46), and (3.47) are to be used to investigate the possible improvement in the solution by a constant shift in the coordinate system; that is $x^{(2)}$ = constant. In these equations the order of the derivatives of $\psi^{(1)}$ near the leading edge is found from the expression

$$\psi^{(1)} = kY - \frac{1}{\sqrt{2}}\sqrt{-X^2 + k^2Y^2 + 1 + \sqrt{1-2(X^2-Y^2k^2) + (X^2+k^2Y^2)^2}}$$

$$(3.48)$$

which is the solution to (3.45).

Near $Y \to 0$ one finds:

$$\psi^{(1)}_Y \to k$$

$$\psi^{(1)}_X \to \frac{X}{(X^2-1)^{1/2}}$$

$$\psi^{(1)}_{XY} \to 0 \qquad\qquad (3.49)$$

$$\psi^{(1)}_{XX} \to \frac{1}{(X^2-1)^{3/2}}$$

$$\psi^{(1)}_{YY} \to -\frac{k^2}{(X^2-1)^{3/2}}$$

Now since the correction $x^{(2)} =$ constant is under consideration, and since $x^{(1)}$, the correction of order ε, is to be zero on the boundary, then as before we take $x^{(1)} \equiv 0$ and (3.46) becomes an equation for $y^{(2)}$,

$$\left(1 - \frac{M^2}{\beta^2}\right) y^{(2)}_{XX} + y^{(2)}_{YY} = 2\frac{M^2}{\beta^2}\left[\psi^{(1)}_X \psi^{(1)}_{XY} - \psi^{(1)}_Y \psi^{(1)}_{XX}\right]. \qquad (3.50)$$

This is the usual equation obtained in the ordinary perturbation method for the second order correction. Near the leading edge equations (3.49) show that the nonhomogenous term has the behavior

$$\psi^{(1)}_Y \psi^{(1)}_{XX} \simeq \frac{1}{(X^2-1)^{3/2}} \quad \text{or, for } X^2-1 \simeq \varepsilon^2,$$

$$\simeq \frac{1}{\varepsilon^3}. \qquad (3.51)$$

Neglecting the solution for $y^{(2)}$ for the moment, the substitution

$$x^{(2)} = \text{constant} \qquad (3.52)$$

into equation (3.47) gives

$$(1 - \frac{M^2}{\beta^2})\, y^{(3)}_{XX} + y^{(3)}_{YY} = y^{(2)}_{XY}(-2\frac{M^2}{\beta^2}\psi^{(1)}_X) + y^{(2)}_{XX}(3\frac{M^2}{\beta^2} - 1)\psi^{(1)}_Y -$$

$$- y^{(2)}_{YY}\psi^{(1)}_Y +$$

$$+ \psi^{(1)}_{XX}\left\{2y^{(2)}_Y + \frac{M^2}{\beta^2}\left[(1-\frac{M^2}{\beta^2})(\psi^{(1)}_X)^2 - (\psi^{(1)}_Y)^2\right]\right\}$$

$$+ \psi^{(1)}_{XX}\left[-2y^{(2)}_X + 2\frac{M^2}{\beta^2}\psi^{(1)}_X\psi^{(1)}_Y\right] . \qquad (3.53)$$

In this equation the term $(\psi^{(1)}_X)^2\,\psi^{(1)}_{XX}$ near the leading edge has the behavior $\frac{1}{(X^2-1)^{5/2}} \approx \frac{1}{\varepsilon^5}$ and thus equation (3.47) becomes of equal importance with equation (3.45) in this region since

$$\varepsilon^3 \text{ times order } \frac{1}{\varepsilon^5} = \varepsilon \text{ times order } \frac{1}{\varepsilon^3} = \text{order } \frac{1}{\varepsilon^2}.$$

$$(3.54)$$

In other words the possibility of setting $x^{(2)}$ equal to a constant has been denied since it leads to requiring a solution of equation (3.53), and it is not possible to effect a simple correction in the compressible case.*

---

* In this connection we mention that although the second order corrections to the velocities in the usual perturbation solutions are no more singular near the leading edge then the first order terms for the case of incompressible flow (c.f. p. 201 [11]), for the compressible case an increase in singularity does occur at the second order level (p. 325 [8]).

BIBLIOGRAPHY

1. Bechert, K., "Zur Theorie ebener Störungen in reibungsfreien Gasen," Ann. der Physik, (5), 37, 89-123 (1940); 38, 1-25 (1940)

2. Bechert, K., "Über die Ausbreitung von Zylinder-und Kugelwellen in reibungsfreien Gasen und Flüssigkeiten," Ann. der Physik (5), 39, 169-202 (1941)

3. Bechert, K., "Über die Differentialgleichungen der Wellenausbreitung in Gasen," Ann der Physik (5), 39, 357-372 (1941)

4. Courant, R. and Friedrichs, K. O., Supersonic Flow and Shock Waves, Interscience Publishers, Inc., New York (1948)

5. Craggs, J. W., "The Breakdown of the Hodograph Transformation for Irrotational Compressible Fluid Flow in Two Dimensions," Proc. Camb. Phil. Soc., 44, Pt. 3, 360-379 (1947)

6. Friedrichs, K. O., "Formation and Decay of Shock Waves," Comm. on Applied Math., 1, 211-246 (1948)

7. Hadamard, J., Leçons sur la propagation des ondes, Hermann, Paris, 1903

8. Hasimoto, H., "Application of the Thin-Wing-Expansion Method to the Compressible Flow past an Elliptic Cylinder," Jnl. of the Physical Society of Japan, 7, 322-328 (1952)

9. Kaplan, C., "The Flow of a Compressible Fluid past a Curved Surface," National Advisory Committee for Aeronautics, Report No. 768 (1943)

10. Kaplan, C., "The Flow of a Compressible Fluid past a Circular Arc Profile," National Advisory Committee for Aeronautics, Report No. 794 (1944)

11. Lighthill, M. J., "A New Approach to Thin Aerofoil Theory," _The Aeronautical Quarterly_, III, 193-210 (1951)

12. Lighthill, M. J., "A Technique for Rendering Approximate Solutions to Physical Problems Uniformly Valid," _The Philosophical Magazine_, [7], XL., 1179-1201 (1949)

13. Lin, C. C., "On an Extension of the von Kármán-Tsien Method to Two-dimensional Subsonic Flows with Circulation around Closed Profiles," _Quarterly of Applied Math._, IV, No. 3, 291-297 (1946)

14. Meyer, R. E., "The Method of Characteristics for Problems of Compressible Flow involving Two Independent Variables," _Quarterly Jnl. of Mech. and Appl. Math._, 1, two parts: 196-219 (June 1948); 451-469 (December 1948)

15. Meyer, R. E., "Focusing Effects in Two-dimensional Supersonic Flow," _Phil. Trans., Roy. Soc. London_, Ser. A, 242, 153-171 (1949)

16. Riemann, B., "Über die Fortpflanzung ebener Luftwellen von endlicher Schwingungsweite," _Gesammelte Werke_, p. 144 (1876)

17. Schoch, A., "Remarks on the Concept of Acoustic Energy," _Acustica_, 3, 181-184 (1953)

18. Stocker, P. M., "On a Problem of Interaction of Plane Waves of Finite Amplitude Involving Retardation of Shock-Formation by An Expansion Wave," *Quart. Journ. Mech. and Applied Math.*, Vol. IV, 170-181 (1950)

19. Stocker, P. M. and Meyer, R. E., "A Note on the Correspondence between the x,t-plane and the Characteristic Plane in a Problem of Interaction of Plane Waves of Finite Amplitude," *Proc. Camb. Phil. Soc.*, 47, 518-527 (1951)

20. Stoker, J. J., *Nonlinear Vibrations*, Interscience Publishers, Inc., New York (1950)

21. Taub, A. H., "Interaction of Progressive Rarefaction Waves," *Annals of Math.*, 47, 811-828 (1946)

22. Theodorsen, T., "Theory of Wing Sections of Arbitrary Shape," National Advisory Committee for Aeronautics, Report No. 411, (1931)

23. Whitham, G. B., "The Propagation of Spherical Blast," *Proc. Roy. Soc.*, A, 203, 572-581 (1950)

24. Whitham, G. B., "The Flow Pattern of a Supersonic Projectile," *Comm. on Pure and Applied Math.*, V, 301-349 (1952)

Phyllis Fox was born in Denver, Colorado, on March 13, 1923. She attended Denver schools, and then Wellesley College in Massachusetts from which she was graduated in 1944 with a B.A. degree in mathematics. From 1944 to 1946 she worked as an engineering assistant associated with the differential analyzer of the General Electric Company in Schenectady, New York. She then returned to Colorado to obtain a B.S. degree in electrical engineering from the University of Colorado in 1948. In the fall of that year she entered M. I. T. and in 1949 received her master's degree in electrical engineering with a thesis concerned with the solution of electric power networks on large-scale digital computers. During most of her doctoral study she was a research assistant on a program of research on Machine Methods of Computation supported by the Office of Naval Research. She has taken a job with the Computation Center of New York University's Institute for Mathematics and Mechanics.